

# OPTIMISE

YOUR BUSINESS WITH US

PRODUCTS & SERVICES

▶ CUT ENERGY COSTS

▶ СНИЖЕНИЕ ЭНЕРГЕТИЧЕСКИХ ЗАТРАТ

▶ CONTROL PROCESSES

▶ КОНТРОЛЬ ПРОЦЕССОВ

▶ CUT PURCHASING COSTS

OEM | ODM | EMS

OEM | ODM | EMS

▶ СНИЖЕНИЕ ЗАТРАТ НА ПОКУПКИ

LUMEL

## ▶ LUMEL 4.0 - PLANT OF NEW TECHNOLOGIES



Our new plant built in 2020 powered by a 125 kW Lumel photovoltaic system.


Lumel S.A. - Plant area - 3639 m<sup>2</sup>.

Lumel Arena (sports and recreation facility for employees and their families) - Area - 1007 m<sup>2</sup>.

# EXPERIENCE THE ELECTRONIC WORLD OF LUMEL



RESEARCH LABORATORY  
ИЗУЧЕНИЕ И СОЗДАНИЕ

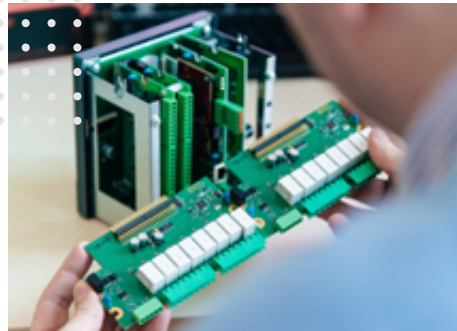

R&D  
ИЗУЧЕНИЕ И СОЗДАНИЕ



SMT ASSEMBLY  
СБОРКА СМТ



QUALITY INSPECTION  
КОНТРОЛЬ КАЧЕСТВА



THT ASSEMBLY  
СБОРКА ТНТ



WAREHOUSE  
СКОП



CUSTOMER SERVICE  
СЛУЖБА ПОМОЩИ



99 DON'T FIND FAULT. FIND A REMEDY.  
ANYBODY CAN COMPLAIN.

## GUARANTEE OF THE HIGHEST QUALITY OF PRODUCTION AND SERVICES

To meet the expectations of our customers **we continuously improve the quality management system.** It takes place at every activity level, from the identification of the customer's needs, through the production process, to the research of the recipients satisfaction.

**To guarantee the highest quality** we continuously supervise the production processes, we aim at the permanent parameter improving and we use materials from suppliers, who meet the highest global standards.

### We work in accordance with:

- Certificate **ISO 9001:2015**,
- Certificate **ISO 14001:2015**.

We fulfill all requirements of 2002/95/EC Directive **RoHS II 2011/65/UE** and **RoHS III 2015/863/UE** about limiting Hazardous Substances in our products.

Our products fulfill requirements:

- **Electromagnetic compatibility acc. to:**
  - immunity against electromagnetic interference EN 61000-6-2,
  - emission of electromagnetic interference EN 61000-6-4.
- **Safety acc. to:** EN 61010.
- **Category III instalation acc. to:** safety requirements for electrical equipment for measurement, control and laboratory use EN 61010.

We declare with full responsibility that all products manufactured by LUMEL S.A. fulfil all requirements of Regulation (WE) of the European Parliament and the European Council no 1907/2006 dated December 18, 2006 regarding registration, rating, permits and limitations regarding chemicals (**REACH**).



	PAGE		PAGE
OPTIMIZATION OF ENERGY COSTS	6	COMMUNICATION	28
Meters and Analyzers of Power Network Parameters	7	I/O Modules	28
Energy Meters with MID certification	10	Data loggers	28
Synchronization Meters	10	Interface/protocol converters	29
PF Controllers	10		
		POWER SUPPLIES	29
PROCESS VISUALIZATION SOFTWARE	11		
PowerVis	11	SOFTWARE TOOLS	30
LUMEL-PROCES	11	eCon - software for Configuration of Lumel Products	30
MARC CLOUD	12	Lumel Scanner	30
PHOTOVOLTAIC INSTALLATIONS	13	ANALOG MEASUREMENTS	31
Photovoltaic String Inverters	13	Analog Meters	31
Reverse Power Controller	14	Current Transformers	35
Terminals for photovoltaic power plants	14	Shunts	38
		Adapter for DIN rail	38
		Enlarging Frame	38
MEASUREMENTS OF ELECTRICAL & NON-ELECTRICAL QUANTITIES	15	Cam Switches	39
Digital Meters	15		
Transducers, Separators	18	PORTABLE MULTIMETERS & CLAMP METERS	40
MEASUREMENTS OF ENVIRONMENTAL PARAMETERS	20	DIGITAL PROTECTION, AUTOMATION, MEASUREMENTS, CONTROL, REGISTRATION AND COMMUNICATION	
		Protection Relays	42
LEVEL MEASUREMENT	21		
Ultrasonic Level Meter & Sensor	21	EMS, ODM ,OEM SERVICES	45
TEMPERATURE & PROCESS CONTROL	22	CALIBRATION & ATTESTATION	48
Controllers	22		
Controllers for Injection Moulds	24		
Power Controllers	25		
		<b>CONTACT US</b>	<b>49</b>
RECORDING	26		
Recorders & data logger	26		

# OPTIMIZATION OF ENERGY COSTS



**Please get in touch with us, if you are looking for the ways to reduce the energy costs and improve the efficiency of the production processes at the same time!**

Our solutions will help you:

- ▶ maintain a continuous monitoring of an ordered power level
  - ▶ avoid the penalty fees for exceeding this power
  - ▶ adjust a level of the ordered power to the actual demand (too low ordered power = penalties for exceeding it, too high ordered power = high fixed costs)
  - ▶ flatten the peak power by delaying the switching on of the most energy-consuming devices
- ▶ monitor an energy at the level of the lines / machines in order to
  - ▶ provide more accurate estimation of the production costs,
  - ▶ analyze the cost of media necessary to produce a given material
- ▶ locate the most energy-consuming loads in your plant based on their real energy consumption
- ▶ check the load of the machines on individual shifts
- ▶ monitor the voltage dips and the sources of electrical interferences that may cause unexpected downtimes
- ▶ account the energy costs internally by the halls, departments, etc.
- ▶ alert the maintenance staff in case of a failure
- ▶ manage energy in case of emergency conditions, e.g. request to lower the power due to network overload.

Besides the benefits mentioned above, it is possible to expand our systems with other useful functions, for example:

- ▶ monitoring of temperature in the switching stations to support plant safety
- ▶ monitoring of compressed air which allows detecting sources of the leaks that cause considerable costs - the compressors are often the most energy-consuming loads
- ▶ monitoring of other media: water, gas, heat
- ▶ monitoring of environmental parameters - temperature, humidity, CO<sub>2</sub>, TVOC or light intensity in the halls
- ▶ monitoring the produced number of items / production details to improve productivity

# METERS AND ANALYZERS OF POWER NETWORK PARAMETERS

## OPTIMIZATION OF ENERGY COSTS



	N43	NR30	ND30	N100	ND45	
Measured parameters (detailed information in user's manuals)	$U_{LN} / U_{LL}$			✓✓		
	average $U_{LN} / U_{LL}$	✓✓		@✓	✓✓	
	$I_L$ / average $I_L / I_N$	✓✓ / @		✓✓ / ✓		
	P / Q / S			✓✓ / ✓		
	$E_P / E_Q / E_S$			✓✓ / ✓		
	4-quadrant measurement	@		✓		
	PF / t <sub>exp</sub> / cosp / φ			✓✓ / - / -		✓✓ / - / ✓
	f / THD U / THD I			✓✓ / ✓		
	Harmonics / interharmonics	- / -	✓ 63 (NR30, NR30IoT) ✓ 51 (NR30PNET, NR30BAC) / -	✓ 63 (ND30, ND30IoT) ✓ 51 (ND30PNET, ND30BAC) / -	✓ 51 / -	✓ 51 / ✓ 51
	P (15/30/60 min.)			✓✓ / ✓		
	Q (15/30/60 min.)					✓✓ / ✓
	S (15/30/60 min.)			✓✓ / ✓		
	I (15/30/60 min.)			✓✓ / ✓		
	Time / Date / Temp.	✓ / @ / -	✓✓ / -	✓✓ / ✓	✓✓ / -	✓✓ / ✓
	Dips / Swells / Overvoltages					✓✓ / ✓
Tariffs / Voltage asymmetry					✓ 4 / ✓	
Memory of min. and max. values	-		✓		-	
Inputs	1 A / 5 A or 63 A 57.7/100 V or 230/ 400 V or 290/ 500 V	1 A / 5 A or 63 A 57.7/100 V and 100/ 170 V or 230/ 400 V and 400/ 690 V	1 A / 5 A 57.7/ 100 V 230/ 400 V or 110/190 V 400/690 V	1 A/5 A 57.7/100 V or 230/400 V or 400/690 V	1 A / 5 A 57.7/100 V or 230/400 V or 69.3/ 120 V	
Outputs	3 x relay 1 x pulse	2 x relay	1 x 0/4...20 mA (option) 2 x relay	pulse 0/12...36 V 1 x pulse, 1 x 0/4...20 mA + 3 x relay or 3 x -20...0...20 mA + 1 x relay	2 x Pt100/Pt1000/5k Ω 4 or 6 x logic - option optionally: 3 or 6 x 0/4...20 mA; 4 or 8 x relay	
Interface	RS-485 Modbus Slave	RS-485 Modbus Slave options: NR30: <b>Ethernet</b> NR30PNET: <b>Profinet</b> NR30IoT: <b>MQTT</b> NR30BAC: <b>BACnet IP</b>	RS-485 Modbus Slave options: ND30: <b>Ethernet</b> ND30PNET: <b>Profinet</b> ND30IoT: <b>MQTT</b> ND30BAC: <b>BACnet IP</b>	RS-485 Modbus Slave <b>Ethernet</b> 10/100 Base-T Modbus TCP, www, FTP - option	RS-485 Modbus Slave, USB Device & Host <b>Ethernet</b> 10/100 Base-T Modbus TCP, www, FTP, NTP	
Display	LCD 4x3 digits + 1 x 7 digits	LCD 20 characters x 4 rows	3.5" colour TFT LCD 320x240 pixel	LED 4 x 4 ½ digit, backlight unit, 2-colour display (red, green) (14 mm)	5.6" LCD TFT colour touch screen 640 x 480 pixel	
Supply voltage		85...253 V a.c./ 90...300 V d.c. or 20...40 V a.c./ 20...60 V d.c.	85...253 V a.c./ 90...300 V d.c. or 20...40 V a.c./ 20...60 V d.c.	85...253 V a.c. / 90...300 V d.c.	85 V..253 V a.c. / 90 V..300 V d.c.	
Protection IP		IP50	IP65	IP40	IP54	
Ext. dimensions		105 x 110 x 60 mm	96 x 96 x 77 mm	144 x 144 x 77 mm	144 x 144 x 104 mm	
Programming		free eCon software (using miniUSB) or using buttons	free eCon software (using RS-485 or Ethernet) or using buttons	free eCon software (using RS-485 or Ethernet) or using buttons	dedicated software or using touch screen	
Additional functions		• connection with S4AO module (module of 4 analog outputs)	• selection of displayed quantities on each of the 12 programmable pages • galvanic isolation between input,output, supply and interface ND30, ND30IoT, ND30PNET: • temperature measurement - 2 x input Pt100	• selection of displayed quantities on each of the 20 programmable pages • galvanic isolation of current and voltage inputs • data archiving in the internal memory 8 GB • <b>available special version with input frequency up to 500 Hz</b>	• <b>measurement class A/S</b> • measurement and logging of energy quality acc. to EN 50160, EN 61000-4-30, EN 6100-4-7 • oscilloscope • galvanic isolation of measuring current and voltage inputs • data archiving on SD card	
			NR30, NR30IoT: • data archiving up to 32 parameters • supervisory relay	ND30, ND30IoT: • data archiving in the internal memory 8 GB • supervisory relay	• programmable counter inputs • dips and swells stored in registers • flicker	

@ - parameter available only through digital interface RS-485 and/or Ethernet

3 YEAR WARRANTY

PRODUCT CODE CONFIGURATOR at www.lumel.com.pl

EPLAN

# METERS AND ANALYZERS OF POWER NETWORK PARAMETERS

OPTIMIZATION OF ENERGY COSTS



	ND20LITE	ND20CT	ND20	ND22	ND25	
Measured parameters (detailed information in user's manuals)	$U_{LN} / U_{LL}$		✓✓			
	average $U_{LN} / U_{LL}$	@/@			✓/-	
	$I_L$ / average $I_L / I_N$		✓✓✓			
	P / Q / S		✓✓✓			
	$E_p / E_q / E_s$		✓✓/-		✓✓✓	
	4-quadrant measurement			✓		
	PF / tgp / cosφ / φ		✓✓✓✓/@		✓/-/-/✓	
	f / THD U / THD I			✓✓✓		
	Harmonics	-		✓ 21	-	✓ 31
	P (15/30/60 min.)		✓✓✓			✓✓/-
	S (15/30/60 min.)		-			✓✓/-
	I (15/30/60 min.)		-			✓✓/-
	Time / Date / Temp.	✓/-/-		✓✓/-		✓✓/-
	Memory of min. and max. values			✓		
Inputs	1 A / 5 A 57.7/100 V 69.3/120 V 230/400 V	<b>0.1 A and 0.25 A</b> 57.7/100 V or 230/400 V	1 A / 5 A 57.7/100 V or 230/400 V or 290/500 V or 63.5/110 V or 69.3/ 120 V	1 A / 5 A 63.5/ 110 V or 127/ 220 V or 133/ 230 V or 220/ 380 V or 230/ 400 V or 239.6/ 415 V or 254/ 440 V	1 A / 5 A 57.5...346.42 V/ 100...600 V	
Outputs	1 x relay 1 x pulse	1 x 0/4...20 mA (option) 1 x relay 1 x pulse	1 x 0/4...20 mA 1 x relay 1 x pulse	1/2 x relay (option) 2 x 4...20 mA (option) or 2 x 0...10 mA (option)	2 x relay (option)	
Interface		RS-485 Modbus Slave		RS-485 Modbus Slave (option)	RS-485 Modbus Slave (option) or <b>Ethernet</b> Modbus TCP (option) or <b>BACnet IP</b> (option)	
Display		3.5" LCD 3 x 4 (11 mm) + 1 x 5 digits (9 mm)		3.5" colour touch screen 320x240 pixel	3.5" LCD 4 x 4 digits + 1 x 9 digits	
Supply voltage	85...253 V a.c./ 90...300 V d.c.		85...253 V a.c./ 90...300 V d.c. or 20...40 V a.c./ 20...60 V d.c.	100...250 V a.c./d.c. or 12...48 V d.c.	100...550 V a.c./d.c.	
Protection IP		IP65			IP54	
Ext. dimensions		96 x 96 x 77 mm		96 x 96 x 80 mm	96 x 96 x 70 mm	
Programming		free eCon software (using RS-485 or Ethernet) or using buttons			-	
Additional functions		<ul style="list-style-type: none"> <li>easy installation of meter and current transformer</li> <li><b>only to cooperation with dedicated current transformers L3XX and LJXX (see page 34)</b></li> </ul>	<ul style="list-style-type: none"> <li>memory of 9000 samples for mean power</li> </ul>	<ul style="list-style-type: none"> <li>phase reversal indication</li> </ul>	<ul style="list-style-type: none"> <li>up to 28 programmable pages</li> <li>data archiving in the internal memory 8 MB</li> </ul>	
		<ul style="list-style-type: none"> <li>galvanic isolation of current inputs</li> </ul>				

3 YEAR WARRANTY

PRODUCT CODE CONFIGURATOR at www.lumel.com.pl



# METERS AND ANALYZERS OF POWER NETWORK PARAMETERS

## OPTIMIZATION OF ENERGY COSTS



	ND03	ND04	ND08	N14	ND10	
Measured parameters (detailed information in user's manuals)	$U_{LN} / U_{LL}$			✓/✓		
	average $U_{LN} / U_{LL}$			✓/✓		
	$I_L$ / average $I_L$ / $I_N$	✓/✓/-	✓/✓/-	✓/✓/Ⓜ	✓/✓/-	✓/✓/✓
	P / Q / S	-	-		✓/✓/✓	
	$E_p$ / $E_q$ / $E_s$	-	-	✓/✓/✓		✓/✓/-
	4-quadrant measurement	-	-	✓		✓
	PF / tgφ / cosφ / φ	-	-		✓/✓/-/-	✓/✓/Ⓜ/Ⓜ
	f / THD U / THD I	✓/-/-	✓/-/-	✓/✓/✓	✓/-/-	✓/✓/✓
	Harmonics	-	-	-		-
	P (15/30/60 min.)	-	-	✓/✓/-	✓/-/-	✓/✓/✓
	S (15/30/60 min.)	-	-	✓/✓/-		-
	I (15/30/60 min.)	-	-	✓/✓/-		-
	Time / Date / Temp.	-	-	-	-	✓/✓/-
Memory of min. and max. values	-	-	Ⓜ		✓	
Inputs	1 A / 5 A 57.7...290 V / 100... 500 V		1 A or 5 A 63.5 / 110 V or 133 / 230 V or 239.6 / 415 V or 254 / 440 V or 220 / 380 V	1 A or 5 A 57.7/100 V or 230/400 V or 400/690 V	1 A or 5 A 57.7/100 V or 230/400 V or 290/500 V	
Outputs	1 x relay - option			1 x relay 1 x pulse	2 x relays 1 x pulse	
Interface	-	-	RS-485 Modbus Slave - option	RS-485 Modbus Slave	RS-485 Modbus Slave	
Display	LED 3 x 3 digits	LED 3 x 4 digits	LCD 3 x 4 digits	LED 3 x 3 digits (14 mm)	3.5" LCD 3 x 4 digits (16 mm)	
Supply voltage	40...300 V a.c./d.c.	40...300 V a.c./d.c. or 12...48 V d.c. or from measuring circuit	60...300 V a.c./d.c.	85...253 V a.c./d.c.	50...64 V a.c. or 195...253 V a.c. or 246...300 V a.c. from measuring circuit	
Protection IP	IP50		IP54	IP40	IP65	
Ext. dimensions	96 x 96 x 66 mm		96 x 96 x 61 mm	96 x 96 x 70.5 mm	96 x 96 x 77 mm	
Programming	-	-	-	free eCon software (using RS-485) or using buttons		
Additional functions	-	-	-	• galvanic isolation of current inputs		


Ⓜ - parameter available only through digital interface RS-485 and/or Ethernet

3 YEAR WARRANTY

PRODUCT CODE CONFIGURATOR at [www.lumel.com.pl](http://www.lumel.com.pl)

EPLAN

### APPLICATION EXAMPLE

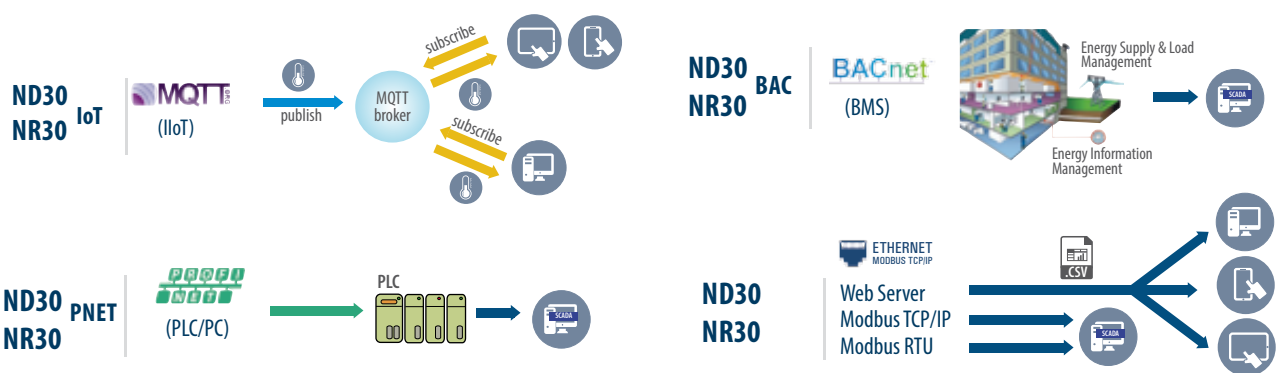

# ENERGY METERS WITH MID CERTIFICATE

OPTIMIZATION OF ENERGY COSTS

## ENERGY METER FOR DIN RAIL MOUNTING



	NMID30-1	NMID30-2	NR10
Input	1 A/ 5 A 3 x 230 / 400 V	10 (100A) 3 x 230/ 400 V	10A (100 A) 230 V measurement of single-phase network parameters
Output	<ul style="list-style-type: none"> <li>• relay output</li> <li>• pulse output (OC type), 3200 imp/ kWh</li> </ul>		2 x pulse output
Interface	RS-485 Modbus RTU		RS-485 Modbus Slave
Supply voltage	85...275 V a.c. 120...380 V d.c.		176...276 V a.c.
Display	3 x 4 digits		LCD with backlight
Protection rating	IP51		
External dimensions	72 x 94.5 mm acc. to DIN 43880	76 x 100 mm acc. to DIN 43880	99 x 36 x 63 mm
Additional functions	<ul style="list-style-type: none"> <li>• 16 measured parameters</li> <li>• password protection</li> <li>• programmable averaging time of the Demand type</li> </ul>		<ul style="list-style-type: none"> <li>• password protection</li> <li>• programming via RS-485 or buttons</li> </ul>

# SYNCHRONIZATION METERS & PF CONTROLLERS

OPTIMIZATION OF ENERGY COSTS

## SYNCHRONIZATION METERS



NS5



SA12/SA19



NF20

	NS5	SA12/SA19	NF20
Input	50...150 V 150...400 V	57.8...500 V	programmable 1 A/ 5 A 30...550 V
Output	2 x relays	-	4/6/8 or 6/8/12 switching outputs, 1 alarm relay
Interface	RS-485 Modbus <b>Ethernet</b> 10/100 Base-T Modbus TCP, www - option	-	RS-485 Modbus - option
Display	3.5" colour TFT LCD, 320x240 pixel	LED indicator	graphic display LCD, 2 x 16 characters
Supply voltage	85..253 V a.c. , 90..300 V d.c. or 20..40 V a.c. , 20..60 V d.c.	-	110...550 V a.c.
Protection rating	IP65	IP52	IP54
External dimensions	96 x 96 x 77 mm	96 x 96 x 111.5 mm (SA19), 144 x 144 x 111.5 (SA12)	96 x 96 x 51 (without extension modules) 96 x 96 x 75 (with extension modules) 144 x 144 x 56
Programming	free eCon software, (using RS-485 or Ethernet) or using buttons	-	-
Additional functions	<ul style="list-style-type: none"> <li>• memory of min. and max. values</li> <li>• many forms of data presentation bargraph, digital</li> <li>• additional control inputs</li> </ul>	<ul style="list-style-type: none"> <li>• one or two ranges of input voltage</li> </ul>	<ul style="list-style-type: none"> <li>• RTC - option</li> </ul>

3 YEAR WARRANTY


PRODUCT CODE CONFIGURATOR at www.lumel.com.pl



## PowerVis SOFTWARE (OP40)

### PROCESS VISUALIZATION SOFTWARE

Works with Lumel power network meters and meters from other companies equipped with the Modbus TCP / IP protocol

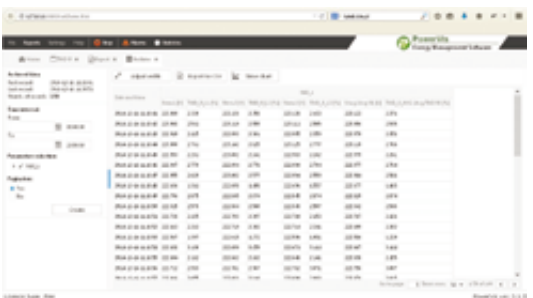


- ▶ multiple user access with varying levels of authorization
- ▶ meant for monitoring of power network parameters
- ▶ works on all web browsers
- ▶ simple and user-friendly configuration (specialist knowledge is not required)
- ▶ user-friendly interface
- ▶ dedicated for LUMEL meters and transducers
- ▶ dedicated for other producers devices with Modbus or Modbus TCP protocols
- ▶ visualization of parameters through: digital indications, trends and tables
- ▶ data archiving
- ▶ presentation of archived data through: tables and trends
- ▶ export of archived data to CSV files
- ▶ signalling of alarm events (directly on computer screen or remotely via e-mail)
- ▶ remote access to PowerVis software through a web browser

## LUMEL-PROCESS SOFTWARE (OP38)

### PROCESS VISUALIZATION SOFTWARE

Works with power network meters with the Modbus TCP / IP protocol and other Lumel products and devices of other companies equipped with the Modbus TCP / IP protocol

- ▶ modern integration and data presentation system,
- ▶ control and measurement applications for industrial installations, intelligent buildings,
- ▶ heat engineering, gas engineering, power engineering and laboratories,
- ▶ for systems built with the application of LUMEL's instruments, compatible with devices from other manufacturers,
- ▶ data exchange using Modbus transmission protocol,
- ▶ visualization of process parameters in form of mimic maps, tables, bargraphs and trends,
- ▶ remote configuration and control of devices,
- ▶ data logging,
- ▶ recording of alarm events in the system,
- ▶ data sharing with other applications using DDE data exchange protocol (DDE client),
- ▶ sharing data with other computers with a LUMEL Process software in the local computer network with the TCP/IP protocol,
- ▶ report templates,
- ▶ report monitoring on the base of archived data,
- ▶ report printing and export to pdf, txt, html formats,
- ▶ view of synoptic map via web browser!

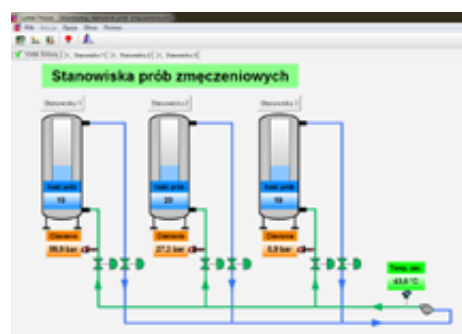


3 YEAR WARRANTY

PRODUCT CODE CONFIGURATOR at www.lumel.com.pl

ePLAN


# MARC ENERGY SOFTWARE

## PROCESS VISUALIZATION SOFTWARE

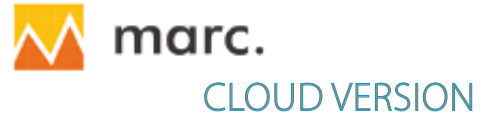

Marc.energy is a cloud-based next generation energy data analytics platform for demand side management of energy loads and process parameter monitoring.




- ▶ Installation of software isn't required on the computer.
- ▶ Works on most of the web browsers.
- ▶ Data is stored on an external server with a backup data function. Therefore it reduces the maintenance costs of company servers.
- ▶ Marc is a multi user program which offers different languages, making it user friendly to operate.
- ▶ Reports can be generated automatically.
- ▶ In the event of alarm states, the user is notified in the form of emails.
- ▶ The application can be downloaded from App store and Google play.

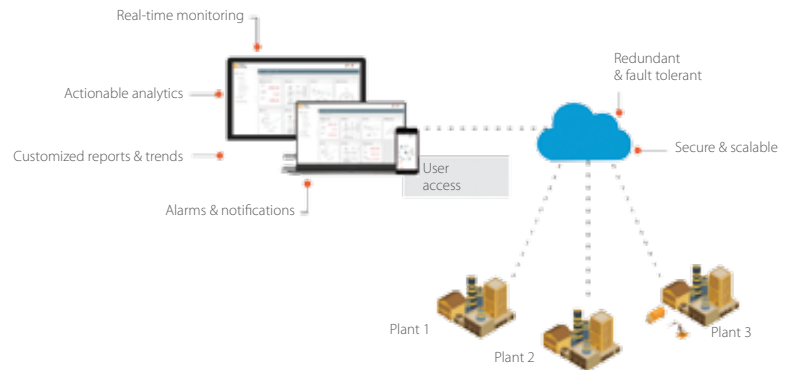

3 YEAR WARRANTY

PRODUCT CODE CONFIGURATOR at www.lumel.com.pl


ePLAN

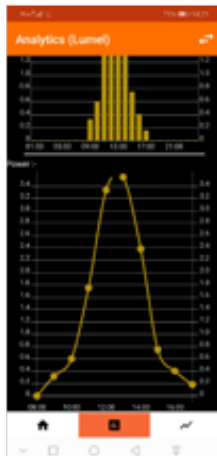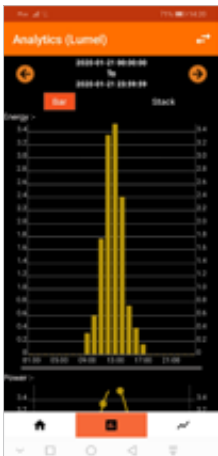

N43\_Lutswanie  
Crank integrity

2020-09-17 10:12:22-09:00

Volts 1	228.80 V
Volts 2	228.91 V
Volts 3	228.29 V
Current 1	71.33 A
Current 2	6704 A
Current 3	74.54 A
Watt 1	9445.28 KW
Watt 2	8022.36 KW
Watt 3	10751.88 KW
VA 1	16321.67 KVA
VA 2	15344.65 KVA

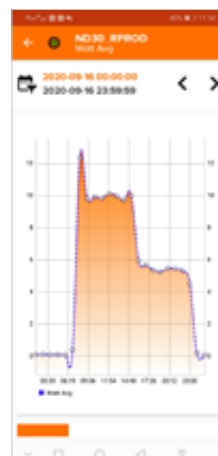

- BERNO ND30
- HT22of
- Inverter 15KW
- Inverter 34kW
- N43\_Lutswanie
- ND30\_test
- ND30
- ND30
- PIB\_Temp

- HT22\_Ansdag\_meters
- HT22\_Assembly
- HT22\_Sab
- HT22\_SMO
- HT22\_Soldering\_wave
- Inverter 25kW\_1
- Inverter\_25kW\_2
- ND30\_Chiller\_1
- ND30\_Chiller\_2



### PVSA

#### Photovoltaic string inverter

- Designed for use in photovoltaic installations connected to the grid (On-grid).
- Available in power classes from 10 to 34kW.
- Maximum efficiency up to 98.5%
- IP -65 structure suitable for both indoor & outdoor installation
- Full power without derating up to 50°C ambient temperature.
- Natural ventilation minimizes breakdown & maintenance.
- Robust design and latest-generation power components with SiC technology.
- Maximum power point tracking, up to 3 MPPT trackers.
- Wide MPPT voltage range 350 to 800V.
- Large graphical display provides a easy, user-friendly operator interface.
- "Transformerless" versions for enhanced efficiency.
- String fault detection & DC fuses on both poles of string.
- Integrated DC circuit breaker under load.
- Tool free & maintenance free terminals on both DC & AC side.
- Integrated datalogger for operation and fault data logging.
- USB port for quick & handy saving of production and operation data.
- Integrated protections against overcurrent, overtemperature, reverse dc polarity, AC & DC overvoltage.
- Wire Box to allow separate access for easy and quick installation.
- 2 RS-485 ports for communication interface
- Integrated inputs/outputs: 3 analog inputs, 2 digital inputs, 2 digital outputs.
- Auxiliary 24 V out (500mA max) for connection of environmental sensors.



ON-GRID

10kW 15kW 20kW 25kW 34kW

RS-485 Ethernet\* GSM\*




3 YEAR WARRANTY

PRODUCT CODE CONFIGURATOR at www.lumel.com.pl

\* Remote monitoring via the optional SM61IoT module or built-in GSM module.



### ► VISUALIZATION OF THE INVERTER OPERATION IN MARC CLOUD

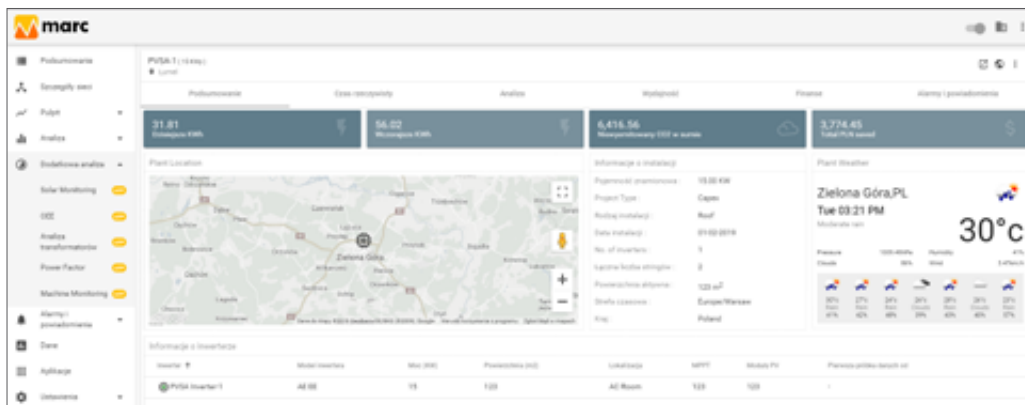



# REVERSE POWER CONTROLLER FOR PVSA INVERTERS

PHOTOVOLTAIC INSTALLATIONS






## SPC5

Reverse power controller for PVSA inverters

- **Reverse Power Control**  
Prevents the inverter power from being exported to the grid by controlling the Inverter power.
- **Compatibility**  
Compatibility with PVSA Inverters.
- **Multiple Inverters control**  
It can control up to 20 PVSA inverters
- **Dual Modbus Card**  
The addon card has dual RS485 ports: one for monitoring and controlling of inverters by SPC5 (device as Master) and the other for monitoring and configure SPC5 (device as Slave).
- **Touch screen graphics LCD**  
Touch sensible color graphics LCD display with resolution of 320x240.

### • Power Flow Representation

Pictorial representation of power flow between Solar Inverters, Grid and the Load.



### • Quick Access GUI

Individual Grid, Load and Solar icons on main screen for direct access to the desired parameters.

### • Potential Free Relay

A dedicated internal relay which can be configured for tripping based on reverse power flow or inverter communication breakage.

### • Grid Threshold setting

Onsite programmable grid threshold power which is the minimum power taken from the grid. This helps in smoothening the power characteristics.

### • Parameter Screen recall

In case of power failure, SPC5 memorizes the last displayed screen.

3 YEAR WARRANTY

PRODUCT CODE CONFIGURATOR at www.lumel.com.pl

ePLAN



# TERMINALS FOR PHOTOVOLTAIC POWER PLANTS


PHOTOVOLTAIC INSTALLATIONS



## CZIP-PV PRO/ ext CZIP-PV PRO

Integrated protection and control relay for photovoltaic power plants switchgears and other renewable energy sources

- **Unique Features:**
  - Under impedance protection against phase to phase short-circuits
- **CZIP®-Set Software**
- **Housing** - industrial, compact aluminum
- **Direct mounting on the mounting plate**
- **Applications:** PV service lines
- **Compliant with the following standards:** EN 50549-1, EN 50549-2

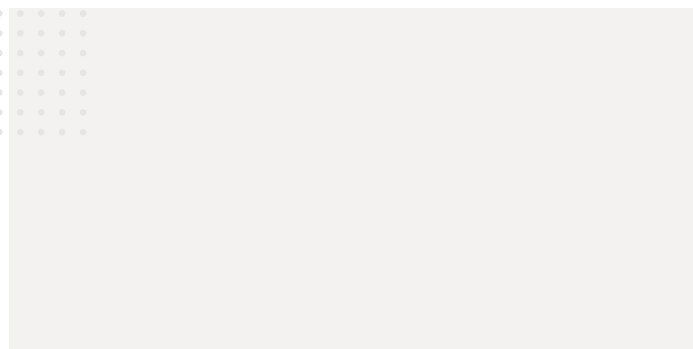

# DIGITAL METERS

## MEASUREMENTS OF ELECTRICAL AND NON-ELECTRICAL QUANTITIES



	N24	N25	N19Z	N20	N20PLUS	N20HPLUS	N20Z	N20ZPLUS	N21	N27D	LLM3
Input	fixed N24T, N25T: Pt100, J, K N24S, N25S: 0/4...20 mA, ±60 mV d.c., ±10 V d.c. N24H, N25H: ±100, ±250, ±400 V d.c., ±1/5 A d.c. N24Z, N25Z: 100, 250, 400 V a.c., 1/5 A a.c., 20...500 Hz	fixed 1 A, 5 A a.c. 64 V, 110 V 240 V, 600 V a.c. 64/110 V, 133/230 V, 239.6/415 V a.c.	fixed Pt100, J, K 0/4...20 mA, ±20 mA 0...60 mV, 0...75 mV (N20PLUS), 0...10 V, ±10 V	fixed Pt100, J, K 0/4...20 mA, ±20 mA 0...60 mV, 0...75 mV (N20PLUS), 0...10 V, ±10 V	fixed ±100, ±400 V d.c.	fixed 1 A, 5 A a.c. 100 V, 250 V, 400 V a.c. 20...500 Hz	programmable Pt100 J, K ±20 mA, ±10 V, ±60 mV	fixed 0...500 V a.c. 0...63 A a.c. -31.5...31.5 kW 45...500 Hz	3x 230...400 V a.c.		
Output	supplying output (24 V/ 30 mA) for S and T versions (option)	-	• 2 x OC • supplying output (24 V/ 30 mA)	-	-	-	• 2 x OC	-	• 1 x relay NO, 250 V~/0.5 A~, • supplying output 24 V d.c. ± 5%, 30 mA	-	-
Display	red LED 4 digits (20 mm)	red LED 5 digits (14 mm)	red LED 4 digits (14 mm)	3-colour programmable LED 5 digits (14 mm)				OLED 128 x 32 pixels in amber colour	yellow LED 4 digits (8.5 mm)	3 x dual red LEDs	
Supply voltage	24 V a.c., 110 V a.c., 230 V a.c., 85...253 V a.c./d.c., 20...40 V a.c./d.c. (option)	80...300 V a.c., 40...300 V a.c./d.c. 20...60 V a.c./d.c.	85...253 V or 20...40 V a.c./d.c. (for N20, N20Z, N20ZPLUS) 85...253 V or 20...40 V a.c./ 20...60 V d.c. (N20PLUS, N20HPLUS)					universal 22..60 V a.c. / 20..60 V d.c. (terminals 12-13) 60..253 V a.c. / 60..300 V d.c. (terminals 13-14)	230 V a.c.	230 V a.c.	
Protection rating	IP65	IP50 or IP65-option	IP65						IP00	IP50	
External dimensions	96 x 48 x 64 mm	96 x 96 x 41 mm or 96 x 48 x 73 mm	96 x 48 x 64 mm						110 x 53 x 60 mm	57 x 110 x 60 mm	
Program- ming	free eCon software (using PD14 programmer)	-	free eCon software (using PD14 programmer - N20, N20Z or through RS-485 - N20PLUS, N20HPLUS and N20ZPLUS using PD10)				free eCon software (using miniUSB)	-	-		
Additional functions	-	-	• rescaling				• vertical display	selection of displayed quantities (kW, V, A, Hz)	external live line indicator LLB		

**3** YEAR WARRANTY

PRODUCT CODE CONFIGURATOR  
at [www.lumel.com.pl](http://www.lumel.com.pl)



# DIGITAL METERS

## MEASUREMENTS OF ELECTRICAL AND NON-ELECTRICAL QUANTITIES



	N30U	N30H	N30o	N30P
Input	programmable Pt100/500/1000 J, K, N, E, R, S ± 20 mA 0...10 V, -10...60 mV 400, 4000 Ω	programmable 1/5 A d.c., ± 100/ ± 500 V d.c.	programmable pulse input (pulses, frequency, rotational speed, period, operating time counter, encoder)	programmable 1/5 A 100/400 V 1-phase power network parameters
Output	4 x relays (2 NO + optional 2 NOC), 1 x analog 0/4...20 mA or 0...10 V - option, 1 x pulse in N30P meter - option, supplying output (24 V/ 30 mA) in N30U and N300 (for supply 85...253 V)			
Interface	RS-485 Modbus Slave - option			
Display	3-colour programmable LED 5 digits (14 mm)			
Supply voltage	85...253 V a.c./d.c. or 20...40 V a.c., 20...60 V d.c.		85...253 V a.c./d.c. or 20...40 V a.c./d.c.	
Protection rating	IP65			
External dimensions	96 x 48 x 93 mm			
Programming	free eCon software (using RS-485) or using buttons			
Additional functions	<ul style="list-style-type: none"> <li>• Conversion of any measured value into a current or voltage analog signal.</li> <li>• Storage of minimal and maximal values for all measured quantities.</li> <li>• 21-point rescaling for the measured value (does not apply to N30P and N27P)</li> </ul>		<ul style="list-style-type: none"> <li>• Password protection.</li> <li>• Programmable current and voltage transformer ratio (applies to N27P and N30P).</li> </ul>	



	N32U	N32o	N32H	N32P	N27P	NR10
Input	programmable Pt100/500/1000 J, K, N, E, R, S ± 20 mA, 4...20 mA ± 10 V ± 60, 150, 300 mV 400, 4000 Ω	programmable 2 x pulse input (pulses, frequency, rotational speed, period, operating time counter, encoder)	programmable current from the shunt ± 75...1500 mV d.c. voltage ± 50...600 V d.c. measurement of d.c. circuit parameters	programmable 1/5 A a.c. 100/230/400 V a.c. 1-phase power network parameters	programmable 1/5 A or direct measurement 32/63 A 100 V/400 V a.c. 1-phase power network parameters	10A (100 A) 230 V measurement of 1-phase power network parameters
Output	1 x NO contact 3 x relays with changeover contact - option 1 x analog 0/4...20 mA or 0...10 V - option 1 x OC output (only in N32P, N32H) 1 x supplying output 24 V d.c. 30 mA (only in N32U, N32o)				2 relays (2 NO) or 1 x relay (NO) + 1 x output 0/4...20 mA	2 x pulse
Interface	RS-485 Modbus Slave - option				RS-485 Modbus Slave	
Display	high contrast LCD with backlight and programmable measuring unit row 1: 6-digit; digits height 12.85 mm row 2: 5-digit; digits height 7.5 mm				OLED 0.96" yellow	LCD with backlight
Supply voltage	85...253 V a.c., 90...300 V d.c. lub 20...40 V a.c., 20...60 V d.c.				85...253 V a.c. 90...300 V d.c.	176...276 V a.c.
Protection rating	IP65				IP50 (1/5 A) or IP00 (32/63 A)	IP51
External dimensions	96 x 48 x 93 mm				110 x 53 x 60 mm	99 x 36 x 63 mm
Programming	free eCon software (using RS-485) or using buttons				free eCon software (using miniUSB, RS-485 or buttons)	using RS-485 or using buttons
Additional functions	<ul style="list-style-type: none"> <li>• second row of the display - displaying the unit, time or other measured value</li> <li>• conversion of any measured value into an analog signal</li> <li>• memory of min. and max. for measured values</li> <li>• advanced functions of averaging measured quantities</li> <li>• 32-point individual characteristic (not applicable to N32H and N32P)</li> </ul>				<ul style="list-style-type: none"> <li>• Password protection</li> <li>• Programmable current and voltage transformer ratio</li> </ul>	<ul style="list-style-type: none"> <li>• Password protection</li> </ul>

3 YEAR WARRANTY

PRODUCT CODE CONFIGURATOR at www.lumel.com.pl

EPLAN

# DIGITAL METERS

## MEASUREMENTS OF ELECTRICAL AND NON-ELECTRICAL QUANTITIES



NA3

NA5PLUS

NA6PLUS

Input	programmable Pt100/500/1000, J, K, N, E, R, S, T 0...5/20 mA d.c., 0...2/5 A d.c., 0...60 mV d.c., 0...10/600 V d.c., 0...3/10/600 V d.c. 0...4 kΩ	programmable Pt100/500/1000, J, K, N, E, R, S, T ± 40 mA d.c., ± 5 A d.c., ± 75 mV d.c., ± 300 mV d.c., ± 10 V d.c., ± 0...600 V d.c., 0...5 kΩ	
Output	1 x relay or 2 x OC (option); 1 x analog (option)	4 x relay or 8 x OC (option); 1 x analog (option)	
Interface	RS-485 Modbus Slave		
Bargraph	3- or 7-colour programmable horizontal	3- or 7-colour programmable vertical	2 x 3- or 2 x 7-colour programmable vertical
Display	LED 4 digits (7 mm) or 4 digits (14 mm)	LED 4 digits (7 mm)	2 x LED 4 digits (7 mm)
Supply voltage	95...253 V a.c./d.c. or 20...40 V a.c./ 20...60 V d.c.		
Protection rating	IP40	IP50	
External dimensions	96 x 24 x 125 mm	48 x 144 x 100 mm	
Programming	free eCon software (using RS-485) or using buttons		
Additional functions	<ul style="list-style-type: none"> <li>• 21-point rescaling (NA5PLUS and NA6PLUS)</li> <li>• arithmetical functions <math>x^2</math>, <math>\sqrt{x}</math>, (+, -, *, / - only in NA6PLUS)</li> <li>• logging of the measured signal in programmed time intervals (800 samples)</li> </ul>	<ul style="list-style-type: none"> <li>• memory of minimal and maximal values for all measured parameters</li> <li>• password protection</li> <li>• conversion of any measured value into a current or voltage analog signal</li> </ul>	


3 YEAR WARRANTY

PRODUCT CODE CONFIGURATOR at [www.lumel.com.pl](http://www.lumel.com.pl)


EPLAN

### APPLICATION EXAMPLE

Temperature and flow measurement in a pipeline

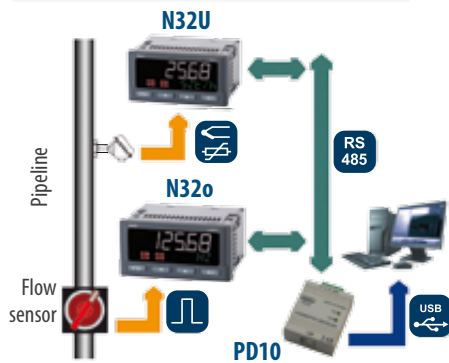

Air temperature and humidity measurement

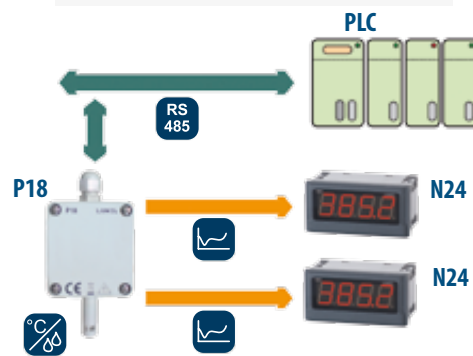

Current measurement in an electroplating plant



Measurement, alarming and logging of load current for a 1-phase engine



# TRANSDUCERS, SEPARATORS

## MEASUREMENTS OF ELECTRICAL AND NON-ELECTRICAL QUANTITIES

### BASIC TRANSDUCERS



	P10	P10Z	P20	P20Z	T22CT	T23CT	P21Z	P20H	P15	P17
Input	fixed 4...20 mA d.c. 0...1/5/20/ 100 mA d.c. 0...60/75/100/ 500 mV d.c. 0...1/5/10/150V d.c.	fixed 1/5 A a.c. 0...100/250/300V a.c.	programmable Pt100/250/500/1000, J, K, S, N 0/4...20, ±20 mA 0...5/10, ±5, ±10 V ±60, ±150 mV 0...400/4000 Ω	fixed 0...60/100/ 150/250/ 400/500/ 600 V a.c. 0...1/5 A a.c.	fixed 50/100/150/ 200/250/ 300/400/ 500/600/ 750 A a.c.	fixed 50, 100, 150, 200, 300 A a.c./d.c.	fixed 0...100/250/ /400 V a.c. 0...1/5 A a.c. 20...500 Hz	fixed 100, 250, 400V d.c. ±100, ±250, ±400 V d.c. ±1, ±5 A d.c.	fixed 0/4...20 mA 1...5 mA	fixed Pt100 J, K, N, E, 0...10 V 0...60 mV
Output	0/4...20 mA or 0/2...10 V	0/2...10 mA or 0/4...20 mA or 0...10 V or 0...5 V	0/4...20 mA or 0...10 V	0...20 mA or 4...20 mA	4...20 mA	0/4...20 mA or 0...10 V or RS-485 Modbus Slave	2 x 0/4...20 mA	passive 0/4...20 mA		
Supply voltage	24...60 V a.c./d.c. 60...300 V a.c./d.c.	24...60 V a.c./d.c. 40...300 V a.c./d.c.	85...253 V a.c./d.c. or 20...85 V d.c./ 20...65 V a.c.	85...253 V a.c./d.c. or 20...40 V a.c./d.c.	24 V d.c.	85...253 V a.c. / 90...300 V d.c. or 20...40 V a.c. / 20...60 V d.c.	20...40 V a.c. 20...60 V d.c. 60...300 V a.c./d.c.	supplied from output current loop		
Protection rating	IP40				IP20	IP65	IP40		IP50	
External dimensions	22.5 x 65.5 x 106.5 mm		22.5 x 120 x 100 mm		70x92x44 mm (up to 300 A) or 90x115x58 mm (150 - 750 A)	70 x 92 x 47 mm	22.5 x 120 x 100 mm		22.5 x 65.5 x 106.5 mm	6.2x77.5 x 100 mm
Additional functions	-	-	free eCon software (using PD14 programmer)	-	hole diameter: 28 mm or 31 mm	hole diameter: 28 mm busbar: 30x10 mm	free eCon software (using PD14 programmer)	-	-	-

### SEPARATORS



P20G P17G

	P20G	P17G
Input	programmable 0/4...20 mA ±20 mA 0...5/10 V ±5V, ±10 V	0/4...20 mA
Output	programmable -20...20 mA -10...10 V	active output 0/4...20 mA
Interface	-	-
Display	-	-
Supply voltage	85...253 V a.c./d.c. or 20...85 V d.c., 20...65 V a.c.	supplied from input current loop
Protection rating	IP40	IP50
External dimensions	22.5 x 120 x 100 mm	6.2x77.5x100 mm
Programming	-	-
Additional functions	free eCon software (using PD14 programmer)	-

### ADVANCED TRANSDUCERS



basic version

version with SD/SDHC card

version with Ethernet & internal memory

	P30U	P300	P30H	P30P
Input	programmable Pt100/250/500/1000, Cu100, Ni100, Ni1000 J, K, N, E, R, S, T, B 0...4/20, ±20 mA -5...20, ±75, ±200 mV, ±10 V, ±24 V 400, 2000, 5500 Ω, RS-485 Master or Slave	2 programmable inputs: pulse counter, frequency, rotational speed, period, operating time counter, pulse differential counter on inputs or encoder	d.c. network parameters programmable current using shunt ± 150 mV voltage 0...12/48/100/250 V voltage 0...600/1000V in set with additional D5 resistor	1-phase power network parameters fixed 1A (X/1A), 5A (X/5A) 100 V(x/100 V) or 250 V
Output	1 x analog 0/4...20 mA or 0...10 V 1 x relay NO 1 x additional NO relay optionally exchangeable with 24 V, 30 mA supplying output	1 x analog 0/4...20 mA or 0...10 V 1 x relay NO 1 x additional NO relay optionally exchangeable with 24 V, 30 mA supplying output	1 x analog 0/4...20 mA or 0...10 V 1 x relay NO optionally exchangeable with additional analog output 0/4...20 mA or 0...10 V 1 x additional NO relay optionally exchangeable with 24 V, 30 mA supplying output	
Interface	RS-485 Modbus (Slave or Master) - standard   Ethernet 10/100 Base-T - option			
Display	LCD 2x8 characters with LED backlight			
Supply voltage	85...253 V a.c./d.c. or 20...40 V a.c./20...60 V d.c.	85...253 V a.c./d.c. or 20...40 V a.c./20...60 V d.c.	85...253 V a.c., 85...300 V d.c. or 20...40 V a.c., 20...60 V d.c.	
Protection rating	IP40			
External dimensions	45 x 120 x 100 mm			
Programming	using buttons or free eCon software using RS-485 Modbus, Ethernet (option)			
Additional functions	free eCon software (using PD14 programmer)	-	<ul style="list-style-type: none"> <li>alarms indicated on the display</li> <li>internal memory 534336 samples</li> <li>WWW server, FTP, Modbus TCP/IP Slave (optionally)</li> <li>data logging in internal memory or on SD card (optionally)</li> </ul>	<ul style="list-style-type: none"> <li>memory of min. and max. values</li> </ul>
		<ul style="list-style-type: none"> <li>rescaling (up to 21 points)</li> <li>memory of min. and max. values (with time stamp)</li> <li>mathematic functions independent for both inputs</li> <li>filtration of periodic signals (only P300)</li> </ul>		

3 YEAR WARRANTY

PRODUCT CODE CONFIGURATOR at www.lumel.com.pl



# TRANSDUCERS, SEPARATORS

## MEASUREMENTS OF ELECTRICAL AND NON-ELECTRICAL QUANTITIES

### POWER TRANSDUCERS



	P41	P30P	P43
Input	programmable 1/ 5 A, 100/ 400 V 1-phase power network parameters	fixed 1/5 A, 100 or 250 V 1-phase power network parameters	fixed 1 or 5 A, 100 or 400 V 3-phase power network parameters
Output	1 x analog programmable $\pm 20$ mA	1 x analog 0/4...20 mA or 0...10 V 1 x NO relay optionally exchangeable with additional analog output 0/4...20 mA or 0...10 V 1 x additional NO relay optionally exchangeable with 24 V, 30 mA supplying output	4 x relays or 2 x relay + 2 x analog programmable $\pm 20$ mA or 4 x analog programmable $\pm 20$ mA
Interface	RS-485 Modbus Slave	RS-485 Modbus (Slave or Master) - standard <b>Ethernet</b> 10/100 Base-T - option	RS-485 Modbus Slave
Display	-	LCD 2x8 characters with LED backlight	-
Supply voltage	85...253 V a.c./90...300 V d.c. or 20...40 V a.c./20...60 V d.c.	85...253 V a.c., 85...300 V d.c. or 20...40 V a.c., 20...60 V d.c.	85...253 V a.c./90...300 V d.c. or 20...40 V a.c./20...60 V d.c.
Protection rating	IP40		
External dimensions	45 x 120 x 100 mm		90 x 120 x 100 mm
Programming	free eCon software using USB or RS-485	using buttons or free eCon software using RS-485 Modbus, <b>HTTP (option)</b>	free eCon software using USB or RS-485
Additional functions	<ul style="list-style-type: none"> <li>memory for selected measured value – 9 000 samples</li> <li>memory of minimal and maximal values</li> <li>programmable current and voltage transformer ratios</li> </ul>	<ul style="list-style-type: none"> <li>alarms indicated on the display</li> <li>internal memory 534336 samples</li> <li>programmable current and voltage transformer ratios</li> <li>WWW server, FTP, Modbus TCP/IP Slave (optionally)</li> <li>data logging in internal memory or on SD card (optionally)</li> </ul>	<ul style="list-style-type: none"> <li>memory for average power – 9 000 samples</li> <li>memory of minimal and maximal values</li> <li>programmable current and voltage transformer ratios</li> <li>pulse output</li> </ul>

3 YEAR WARRANTY

PRODUCT CODE CONFIGURATOR at www.lumel.com.pl



### P18 AND P19 TEMPERATURE AND HUMIDITY TRANSDUCERS



	P18L	P18	P18D	P18S	P19
Measurement range	-30 ... -20 ... 60 ... 85°C or 0...100% RH	-30 ... -20 ... 60 ... 85°C, 0...100% RH			-20 ... 60°C, 0...100% RH
Output	passive 4...20 mA	2 x 4...20 mA or 0...10 V (option)			-
Interface	-	RS-485 Modbus			
Galvanic isolation	-	supply/ RS-485 (for version without analog outputs)		supply/ RS-485	
Supply voltage	19...30 V d.c. (supplied by a current loop)	9 ... 24 V d.c./a.c		9 ... 28 V d.c./a.c	9 ... 24 V d.c./a.c
Protection rating	IP65				IP20
External dimensions	38 x 58 x 118 mm			(sensor case) 86 x 12.5 mm	120 x 80 x 25 mm
Additional functions	-	<ul style="list-style-type: none"> <li>calculation of other quantities (dew-point temp.; absolute humidity)</li> <li>available version with sensor mounted on the wire 0.5 m</li> </ul>		<ul style="list-style-type: none"> <li>memory of measured and calculated min. and max. values</li> <li>wire to connect RS-485 and supply</li> </ul>	-
			<ul style="list-style-type: none"> <li>data presentation on a LCD display</li> <li>configuration of transmission parameters using the capacitive button</li> </ul>		

# MEASUREMENTS OF ENVIRONMENTAL PARAMETERS

## HUMIDITY & TEMPERATURE MONITOR



HT20

## ENVIRONMENTAL PARAMETERS DATA LOGGER



HT22IoT

## DATA LOGGER



HT25


	HT20	HT22IoT	HT25
Number of channels	up to 4 channels ( temperature, humidity relative and absolute, dew point)	up to 12 channels (temperature, humidity relative and absolute, dew point, illuminance, total volatile organic compounds - TVOC, CO <sub>2</sub> concentration)	up to 16 channels (4 channels reserved for data logging from P185/P18/P18D)
Input	built-in temperature and humidity sensor	built-in temperature and humidity sensor, illuminance, TVOC, CO <sub>2</sub> concentration sensor	Modbus RTU Master
Output	Modbus TCP/IP, Modbus RTU (only for HT22IoT)		
Measurement range	-20...60 °C, 0...100% RH	-20...60 °C, 10...90% RH, 0...60000 lx, 0...60000 ppb, 400...60000 ppm	-
Interface	Ethernet (WWW, FTP, SMTP, DHCP); RS-485 Modbus RTU (only for HT22IoT)		1 x RS-485 (Modbus Slave or Master) Ethernet (WWW, FTP, SMTP, DHCP)
Memory	internal - 8GB		
Display	LCD, 2 x 16 characters		LCD, 2 x 16 characters and LED, 4 characters
Supply voltage	6V d.c. or PoE IEEE 802.3af - option		12V d.c. or PoE IEEE 802.3af - option
Protecting rating	IP20		
External dimensions	150 x 100 x 30 mm		
Additional functions	<ul style="list-style-type: none"> <li>data presentation on a LCD display and on website</li> <li>parameter configuration through a web browser</li> </ul>	<ul style="list-style-type: none"> <li>email messages in case of alarm occurs</li> <li>acoustic signalling of alarm events</li> </ul>	<ul style="list-style-type: none"> <li>up to 90 monitored parameters (10 groups 9 register each) via web browser</li> <li>up to 100 monitored parameters (10 group 10 register each) via Modbus TCP/IP</li> <li>logging of 16 parameters (4 parameters reserved for P185/P18/P18D)</li> </ul>

3 YEAR WARRANTY


PRODUCT CODE CONFIGURATOR at www.lumel.com.pl

ePLAN

### APPLICATION EXAMPLE

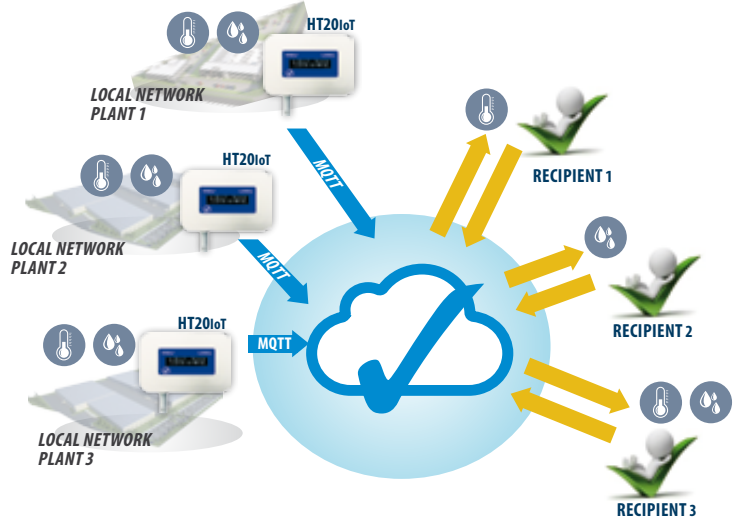

Environment measurements and access to data with built-in web server.

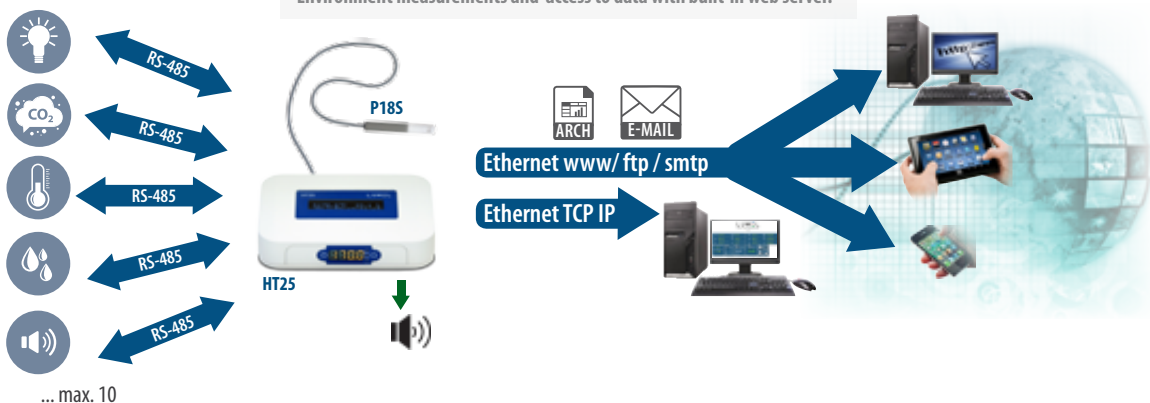

# ULTRASONIC LEVEL METER & SENSOR

## LEVEL MEASUREMENT

### ULTRASONIC LEVEL METER



**ULT20**








### ULTRASONIC LEVEL SENSOR




**ULS10**

Range of distance measurement	0.5...8 m The measuring range is strongly dependent on the environment in which the measurements are made and the surface from which the ultrasonic wave is reflected. Typical damping for a given environment (reflective medium) is summarized in the table next.	10 m or 15 m
Measurement resolution	0.001 m	0.001 m
Output	1x analog 0/4...20 mA 1 x relay (2 NO outputs) 1 x pulse	1 x analog 4...20 mA
Interface	RS-485 Modbus Slave USB Device, v.2.0.	RS-485 Modbus Slave
Supply voltage	12...24...40V d.c.	24 V d.c./ 300 mA
Protection rating	IP65	IP66 or IP68
Programming	free eCon software	
Additional functions	<ul style="list-style-type: none"> <li>two 32-points individual characteristic (recalculate functions)</li> <li>memory of min. and max. values (with time stamp)</li> <li>internal data and setup memory</li> </ul>	-

#### Typical damping for a given environment (reflective medium)

FLUID		GRANULAR		DUST	
	Typical attenuation [dB]		Typical attenuation [dB]		Typical attenuation [dB]
<b>Calm surface</b> 	0	<b>Hard, porous</b> 	40	<b>Low dust</b> 	about 5
<b>Wavy surface</b> 	from 5 up to 10	<b>Soft with strong damping (e.g. peat)</b> 	from 40 up to 60	<b>Large dust</b> 	from 5 up to 20
<b>Strong turbulence (agitators, etc.)</b> 	from 10 up to 20				

### APPLICATION EXAMPLE

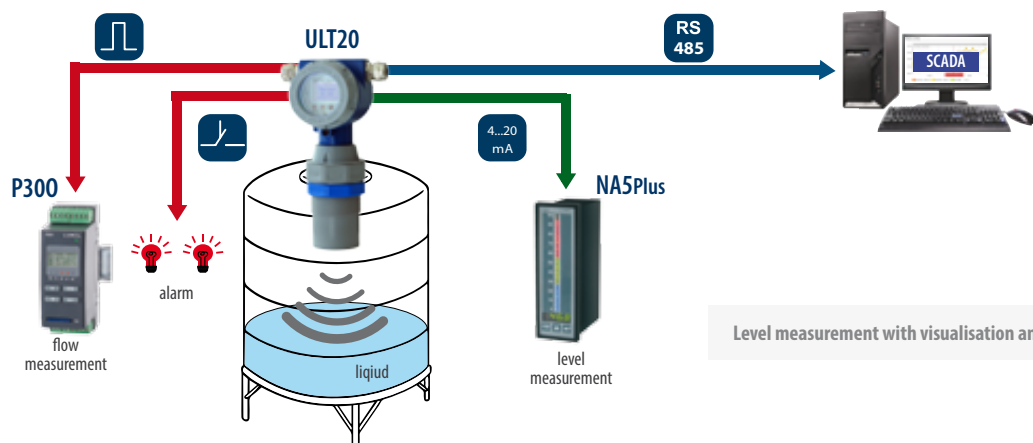

# TEMPERATURE CONTROLLERS

TEMPERATURE & PROCESS CONTROL

## INDUSTRIAL PROCESS CONTROLLERS



	RE11	RE22	RE71	RE81	RE72	RE82	RE92
Number of channels	1	1	1	1	1	1	2
Input	programmable Pt100, J, T, K, S, R	programmable Pt100/1000 J, T, K, S, R, B, E, N, L or 0/4...20 mA, 0...5/10V	fixed Pt100 J, K, S		programmable Pt100/1000 J, T, K, S, R, B, E, N, L 0/4...20 mA 0...5/10V		programmable 2 x Pt100/500/1000, Ni100, Cu100 J, T, K, S, R, B, E, N, L 0/4...20 mA 0...5/10V <b>2 x digital input (RS-485 Modbus Master)</b>
Additional input	-	-	-	-	logic/ current transformer input/ 0/4... 20 mA (option)	2 x logic/ current transformer input/ 0/4...20 mA	3x logic and 0/4...20 mA / 0...5/10 V / potentiometer (100)1000 Ω (option) <b>3 x binary input interface</b>
Output	1 x relay/ logic 0/12V 1 x relay	relay or logic 0/5 V	relays or logic 0/6 V	2 x relays or 1 x relay + 1 x logic 0/6 V	2 x relays / logic 0/5 V / analog 0/4...20mA / 0...10 V / supplying output 24 V d.c. 30 mA - option	2 x relays and 2 x relays / logic 0/5V / analog 0/4...20 mA / 0...10 V (option) supplying output 24V d.c. 30mA- option	max. 6 x relays / 2x logic / 2 x analog 0(4)... 20 mA / 0...10 V (option) supplying output 24 V d.c. 30 mA - option
Interface	-	-	-	-	RS-485 Modbus		<b>2 x RS-485 (Modbus Slave &amp; Master), Ethernet</b> - option
Alarm	1	-	-	1	max. 2	max. 3	max. 6
Control	on/ off or PID with self-tuning, heating or cooling						
	-	-	-	-	step-by-step		
	-	-	-	-	programmed		
Display	white and green LED 4+4 digits (15.3 mm / 8 mm)	red LED 4 digits (9.2 mm)	red LED 4 digits (7,6 mm)	red and green LED 2 x 4 digits (7,6 mm)		red and green LED 2 x 4 digits (7,6 mm) + 2 bargraphs	colour LCD 3.5" TFT 320 x 240 pixels
Supply voltage	85...270 V a.c./d.c.	230 or 110 or 24V a.c.	230 V a.c.		85...253 V a.c./ d.c. or 20...40 V a.c./d.c.		85...253 V a.c./d.c.
Protection rating	IP50	IP65					
External dimensions	52x52x76 mm	48 x 48 x 93 mm	48x48x93 mm	48x96x93 mm	48 x 48 x 93 mm	48 x 96 x 93 mm	96 x 96 x 91 mm
Programming	-	using buttons	using buttons or free eCon software (using PD14 programmer)		using buttons or free eCon software using RS-485		using buttons or free eCon software using RS-485 or Ethernet
Additional functions	-	• soft start	-		• soft start	• 6 types of alarms	• alarm LATCH function
	-	-	-		• profile control (15 programs with 15 segments in each)	-	• <b>parameter logging on SD card</b> • <b>FTP and WEB server - option</b> • profile control (20 programs with 15 segments in each)

3 YEAR WARRANTY

PRODUCT CODE CONFIGURATOR at www.lumel.com.pl



# TEMPERATURE CONTROLLERS & LIMITERS

## TEMPERATURE & PROCESS CONTROL

### INDUSTRIAL PROCESS CONTROLLERS

### TEMPERATURE LIMITER







	RE55	RE60	RE62	RE01	RL10
Number of channels	1	1	1	1	1
Input	fixed Pt100 J, K, S	fixed Pt100 J, K, S	programmable Pt100 J, K ± 20 mA, ± 10 V, ± 60 mV	fixed Pt100, Pt1000 NTC	programmable Pt100/1000 J, T, K, S, R, B, N
Additional input	-	-	-	logic	-
Output	2 x relay or 1 x logic 0/5 V + 1 x relay	1 x relay or 1 x logic 0/5 V or 2 x relay - option	max 3 x relay or 2 x relay and 1 x analog supply 24 V d.c. - option	2 x relay (1 x NOC 10 A/230 V, 1 x NO 5 A/230 V)	relay
Interface	-	-	RS-485 (option)	-	RS-485
Alarm	1	max 2 - option	max 3	max 2	-
Control	on/off, PID, heating or cooling				on/off
Display	green LED 4 digits (10 mm)	LCD (2 x 8 characters)	OLED 128 x 64 pixel, amber color	red LED 4 digits (14 mm)	red LED 4 digits (9.2 mm)
Supply voltage	85... 253 V d.c./a.c.	24 or 110 or 230 V a.c. or 18...72 V d.c.	22...60 V a.c. / 20...60 V d.c. (terminals 11-12) or 60...253 V a.c. / 60...300 V d.c. (terminals 10-11)	230 V a.c.	230 V a.c.
Protection rating	IP40		IP30	IP65	
External dimensions	96 x 96 x 65 mm	45 x 100 x 120 mm	53 x 110 x 60.5 mm	76 x 34 x 80 mm	48 x 48 x 93 mm
Programming	using buttons		using buttons or free eCon software using RS-485	using buttons or free eCon software (using PD14 programmer)	using buttons or free eCon software using RS-485
Remarks	-			defrost function with programmable automatic or manual mode	meets the requirements of EN 60519-2 for class 2 (Safety in electroheat installations)

3 YEAR WARRANTY

PRODUCT CODE CONFIGURATOR at www.lumel.com.pl



### APPLICATION EXAMPLE

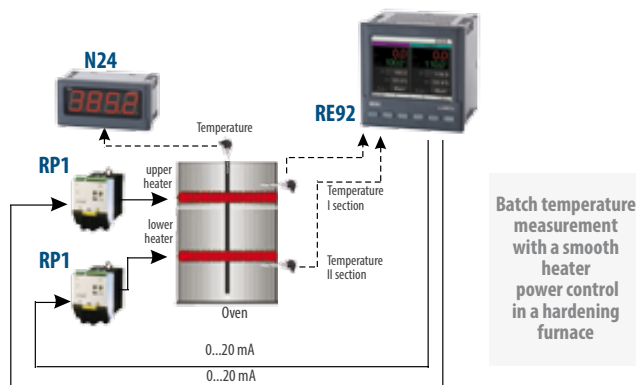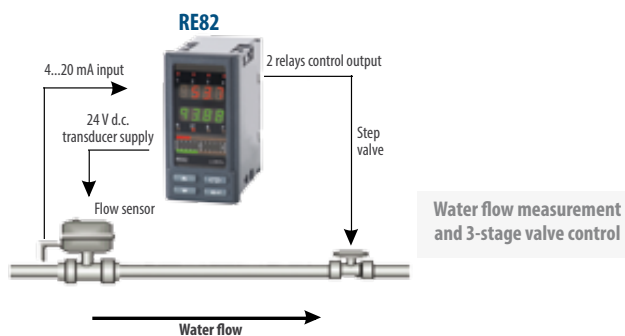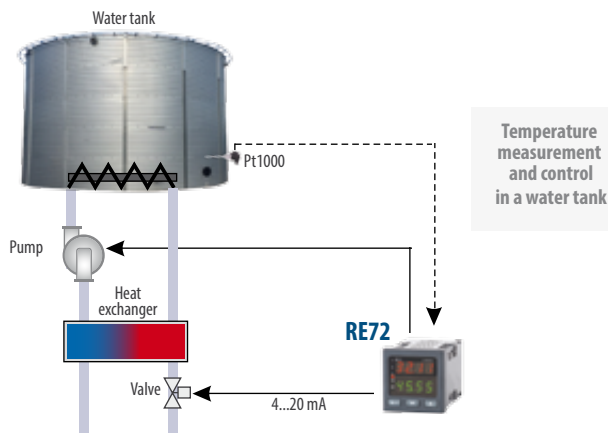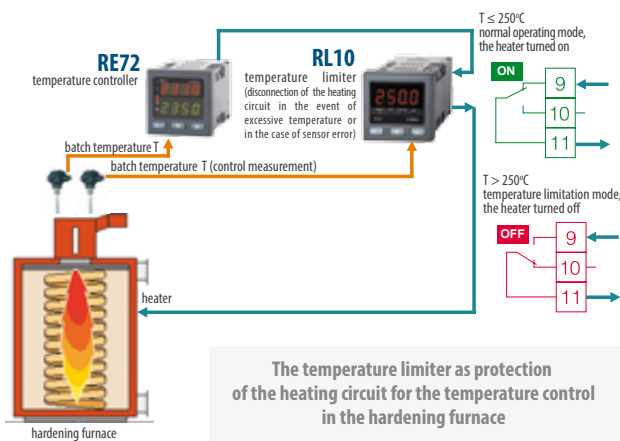

# CONTROLLER FOR INJECTION MOULDS

TEMPERATURE & PROCESS CONTROL

## SYSTEM FOR INJECTION MOULDS WITH HEATED CHANNELS



**SR11**

Number of channels	1...8
Input	fixed Fe-CuNi (J) logic 24 V d.c.
Output	1 output per control zone (15 A)
Control	Fuzzy Logic, PID with self-tuning
Interface	RS-485 with Modbus protocol (option)
Display	LED 14 mm 2 x 3 digits
Supply voltage	230 V a.c. (for system with 1 control zone) 3 x 230/ 400 V a.c. (for system with 2...8 control zones)
Protection rating	IP30
External dimensions	77.5 x 200 x 355 mm (1 control zone) 215 x 197 x 355 mm (2 or 3 control zones) 365 x 197 x 355 mm (4, 5 or 6 control zones) 465 x 197 x 355 mm (7 or 8 control zones)
Additional functions	<ul style="list-style-type: none"> <li>• Fuzzy Logic algorithm ensures a high accuracy temperature control and optimal energy consumption</li> <li>• soft-start function and leakage current monitoring ensure prolonged heaters reliability and operation safety for users</li> <li>• during a break in system operation, a decreased temperature is maintained, what ensures a fast restart of the system                             <ul style="list-style-type: none"> <li>- damage detection:                                     <ul style="list-style-type: none"> <li>- too high heater leakage current,</li> <li>- damage of the load circuit,</li> </ul> </li> <li>- short-circuit, break or inverse polarization in the sensor circuit.</li> </ul> </li> </ul>

3 YEAR WARRANTY

PRODUCT CODE CONFIGURATOR at www.lumel.com.pl



### ► APPLICATION EXAMPLE

Temperature control in an injection mould





**RP7**



**RP1**



**RPL1**




**RP3**


	RP7	RP1	RPL1	RP3
Version		1-phase		3-phase
Control	phase	phase, pulse, on/off		
Input signal		0..5/10V, 0/4..20mA potentiometer		
Output	-	2 x relays		
Output current	5-15 A	25-125 A		3 x 40-450 A
Load supply voltage	230 V	230 V, 400 V a.c.	230, 400, 500 V a.c.	400 V a.c.
Load configuration	2-wire	2 or 3-wire		3, 4 or 6-wire
External dimensions	50 x 105 x 105 mm	135 x 201 x 199 mm 135 x 231 x 199 mm	135 x 201 x 199 mm 135 x 231 x 199 mm - RPL1-x4xx (version with fan)	212 x 318 x 177 mm (40, 70, 125 A versions) 383 x 433 x 281 mm (200, 300, 450 A versions)

### APPLICATION EXAMPLE

Continuous temperature control in furnace

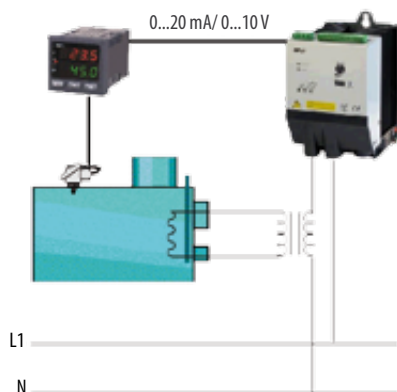

Program following temperature control in a high power oven with electrical heaters

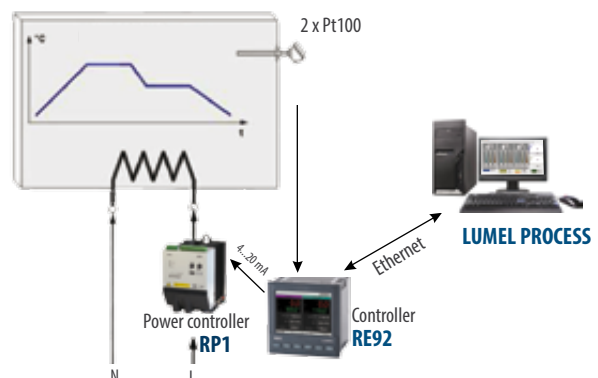

# RECORDERS

## RECORDING



**SOMING**  
AVAILABLE  
IN Q4 2021



	SM61IoT	KD6	KD7	KD8
Number of channels	up to 2500	up to 60 logical channels (max. 8 universal analog channels)	up to 24 channels (max. 12 analog channels and/or max. 24 digital channels)	up to 6
Input	Port II: Modbus RTU Master, (100 groups 25 registers each) 2 x logic (option)	programmable (0, 4 or 8 inputs) Pt100/500/1000, J, K, N, E, R, S, T, B, ± 40 mA ± 1000 mV 0...4000 Ω	programmable (3, 6, 9 or 12 inputs) Pt100/500/1000, Ni100, Cu100, J, K, N, E, R, S, T, B, L, ± 20mA ± 9999mV 50...2000 Ω 0...2000 Ω	programmable (3 or 6 inputs) Pt100/500/1000 Ni100, Cu100, J, K, N, E, R, S, T, B, L, ± 20mA ± 9999mV 50...2000 Ω 0...2000 Ω
		logic input 0/5...24 V d.c. (2, 6 or 10 pcs.)	logic input 0/5...24 V d.c. (8 or 16 pcs.)	logic 0/5...24 V d.c. (4 or 8 pcs.)
Output	Port I: Modbus RTU/TCP Slave, 2 x relays (option)	Modbus RTU Master (10 x 10 registers)	Modbus RTU Master (24 registers)	-
		relays (2, 6, 8, 10 or 14) analog 0/4...20 mA (0, 4 or 8) supplying output 24 V d.c. 30 mA	relays (8 or 16) relays OptoMOS (8 or 16) analog (4 or 8) 0...5, 0/4...20 mA 0... 5 V, 1...5 V, 0...10 V supplying output (2 x 24 V d.c. 30 mA)	relays (6 or 12)
Interface	2 x RS-485 (Modbus Slave i Master) 1 x RS-232 (Modbus Slave) USB Device 1.1. <b>Ethernet</b> 10/100 Base-T Modbus TCP/IP <b>MQTT</b>	2 x RS-485 (Modbus Slave & Master) 1 x USB Host 2.0 1 x Ethernet (Modbus TCP/IP, WWW, FTP, NTP, DHCP)	2 x RS-485 (Modbus Slave and Master) 1 x RS-232 (Modbus Slave) USB Device 1.1. <b>Ethernet</b> 10 Base-T	RS-485 (Modbus Slave) USB Device 1.1.
Memory	8 GB	internal 8 GB	internal – up to 6 MB external – CF card up to 4 GB	
Display	-	colour LCD 3,5" TFT type, 320 x 240 pixels	LCD 5,7" TFT type 320 x 240 pixels with touch panel	
Supply voltage	85...253 V a.c., 90...300V d.c. or 20...40 V a.c., 20...60V d.c. or 10...16 V a.c., 10...20V d.c.	85...253 V a.c., 90...300 V d.c. or 20...60 V d.c.	90...253 V a.c., 90...300 V d.c. or 18...30 V d.c.	
Protecting rating	IP40/IP20	IP65		
External dimensions	45 x 120 x 100 mm	96 x 96 x 77 mm	144 x 144 x 171 mm	144 x 144 x 171 mm
Additional functions	<ul style="list-style-type: none"> <li>• HTTP (WEB server -visualization in format of synoptic maps),</li> <li>• DHCP</li> <li>• FTP Server,</li> <li>• RTC</li> </ul>	<ul style="list-style-type: none"> <li>• many forms of data presentation: linear, bargraph, chart,</li> <li>• digital and analog indicators,</li> <li>• WWW and FTP Server (KD6, KD7)</li> </ul>		
		<ul style="list-style-type: none"> <li>• advanced mathematical operations on measured values</li> </ul>	<ul style="list-style-type: none"> <li>• Windows® CE operating system</li> <li>• PC software: KD SETUP, KD CHECK, KD CONNECT, KD ARCHIVE                             <ul style="list-style-type: none"> <li>• user access levels</li> <li>• menu available in 8 language versions</li> </ul> </li> </ul>	


**3** YEAR WARRANTY

PRODUCT CODE CONFIGURATOR at www.lumel.com.pl




### APPLICATION EXAMPLE



Access to the device from anywhere in the world thanks to the built-in web server.

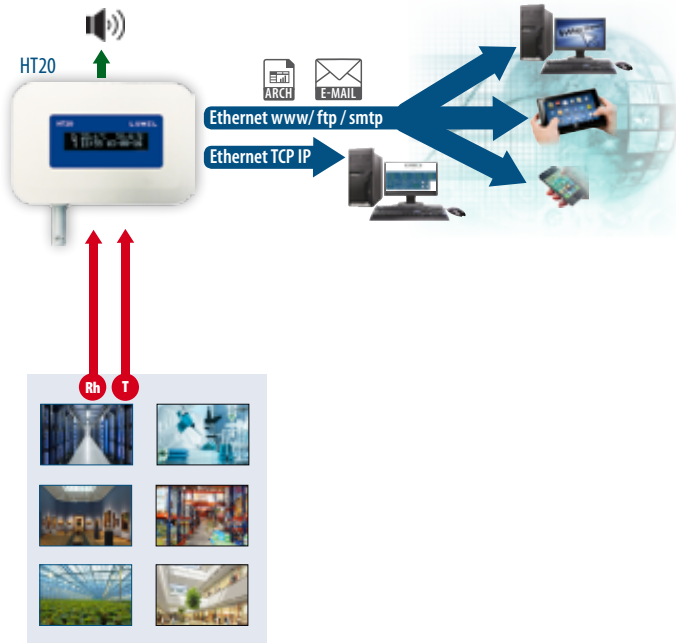

Measurement and visualization of motor working parameters (temperature and motor load)

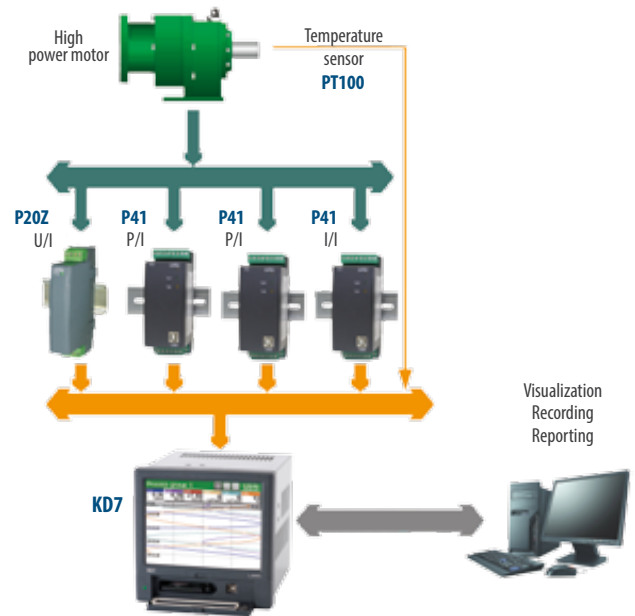

Temperature measurement, logging and alarming

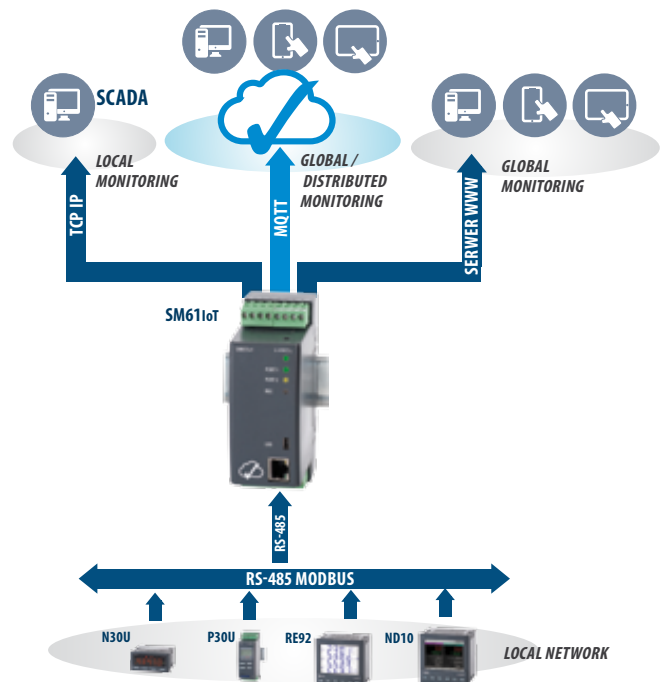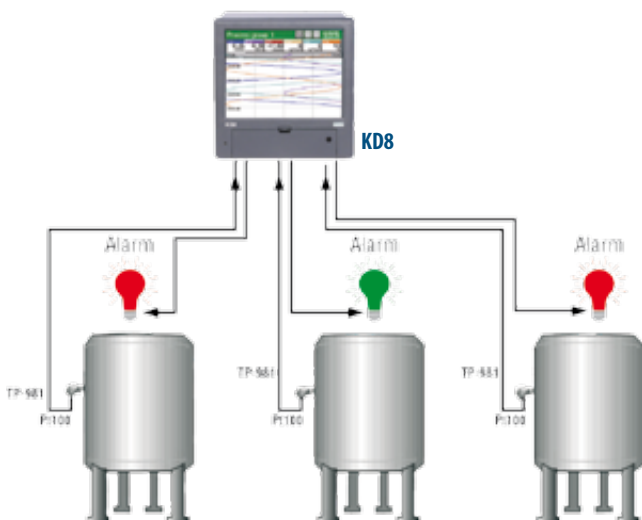

# I/O MODULES, COMMUNICATION MODULES

## COMMUNICATION

### INPUT/OUTPUT MODULES



	SM1	SM2	SM3	SM5	SM4	S4AI	S4AO	
Number of channels	2	4	2	8	4 or 8	4	4	
Inputs/outputs	fixed inputs: Pt100(-200...850°C), 0...400 Ω or 0/4...20 mA or 0...10 V		programmable inputs: logic on/off or pulse counter up to 1 kHz 0...4 294 967 295 pulses		fixed inputs: logic on/off	fixed outputs: 4 x relay or 8 x OC	programmable inputs: 4 x ± 10 V, ± 20 mA or 4 x Pt100, Pt500, Pt1000 J, k, S, ± 150 mV	fixed outputs: 4 x 0/4...20 mA or 4 x 0...10 V or 2 x 0/4...20 mA + 2 x 0...10 V
Interface	RS-485 Modbus Slave, RS-232 for configuration					RS-485 Modbus (Slave), USB for configuration	2 x RS-485 Modbus (Slave, Master) USB for configuration	
Baud rate	2400; 4800; 9600; 19.2 k; 38.4 k; 57.6 k; 115 k bit/s					1200; 2400; 4800; 9600; 19.2 k, 38.4 k, 57.6 k, 115.2 k bit/s		
Supply voltage	85...253 V a.c./d.c.; 20...50 V a.c./d.c.					85...253 V a.c./ 90...300 V d.c. 20...40 V a.c./ 20...60 V d.c.		
Protection rating	IP40							
External dimensions	22.5 x 120 x 100 mm	45 x 120 x 100 mm	22.5 x 120 x 100 mm	45 x 120 x 100 mm	45 x 120 x 100 mm	53 x 110 x 60 mm		

### DATA LOGGERS



SM61IoT



HT25

	SM61IoT	HT25
Number of channels	up 2500 digital channels	up to 16 channels (4 channels reserved for data logging from P18S/P18/P18D)
Input	Port II: Modbus RTU Master (100 groups 25 registers each), 2 x logic	Modbus RTU Master
Output	Port I: Modbus RTU/TCP Slave, 2 x relay	Modbus TCP/IP
Interface	2 x RS-485 (Modbus Slave and Master) 1 x RS-232 (Modbus Slave) USB Device 1.1. <b>Ethernet</b> 10/100 Base-T Modbus TCP/IP, <b>MQTT</b>	1 x RS-485 (Modbus Slave or Master) <b>Ethernet</b> (WWW, FTP, SMTP, DHCP)
Memory	8 GB	8 GB
Supply voltage	85...253 V a.c./ 90...300 V d.c. or 20...40 V a.c./ 20...60 V d.c. or 10...16 V a.c./ 10...20 V d.c.	12 V d.c. or PoE IEEE 802.3af - option
Protection rating	IP40	IP20
External dimensions	45 x 120 x 100 mm	150 x 100 x 30 mm
Additional functions	<ul style="list-style-type: none"> <li>• HTTP (web server - visualization in format of synoptic maps),                             <ul style="list-style-type: none"> <li>• DHCP,</li> <li>• FTP server,</li> <li>• RTC</li> </ul> </li> </ul>	<ul style="list-style-type: none"> <li>• data presentation on a LCD display and on website                             <ul style="list-style-type: none"> <li>• email messages in case of alarm occurs</li> <li>• acoustic signaling of alarm events</li> </ul> </li> <li>• parameter configuration through a web browser</li> <li>• up to 90 monitored parameters (10 groups 9 register each) via web browser</li> <li>• up to 100 monitored parameters (10 group 10 register each) via Modbus TCP/IP</li> <li>• logging of 16 parameters (4 parameters reserved for P18S/P18/P18D)</li> </ul>

3 YEAR WARRANTY

PRODUCT CODE CONFIGURATOR at www.lumel.com.pl

ePLAN


# I/O MODULES, COMMUNICATION MODULES, POWER SUPPLIES

RECORDING

## INTERFACE/PROTOCOL CONVERTERS



	PD51	PD8	PD10
Interface 1	RS-232	RS-485, RS-232	RS-485
Interface 2	RS-485	<b>Ethernet</b> RJ45	USB
Interface 3	-	USB	-
Baud rate	1200, 2400, 4800, 9600, 19200, 38400, 57600, 115200 [bit/s]	300, 600, 1200, 2400, 4800, 9600, 19200, 38400, 56000 bit/s (RS-485) 10, 100 Mbit/s (Ethernet)	to 1 Mb/s
Supply voltage	7...35Vd.c.or 20...24...40V a.c./d.c.or 85...230...253V a.c./d.c.	85...230...253 V a.c./d.c. 20...24...50 V a.c./d.c.	supplied from USB port
Protection rating frontal	IP40		
Ambient temperature	0...23...55°C	-20...23...45°C	0...55°C
External dimensions	22.5 x 120 x 100 mm	45 x 120 x 100 mm	52 x 44 x 24 mm
Additional functions	<ul style="list-style-type: none"> <li>converter/repeater</li> <li>galvanic isolation</li> </ul>	<ul style="list-style-type: none"> <li>galvanic isolation</li> <li>Digi RealPort®, TCP/IP, HTTP, ICMP, DHCP, ARP</li> <li>Modbus TCP</li> </ul>	<ul style="list-style-type: none"> <li>galvanic isolation</li> </ul>

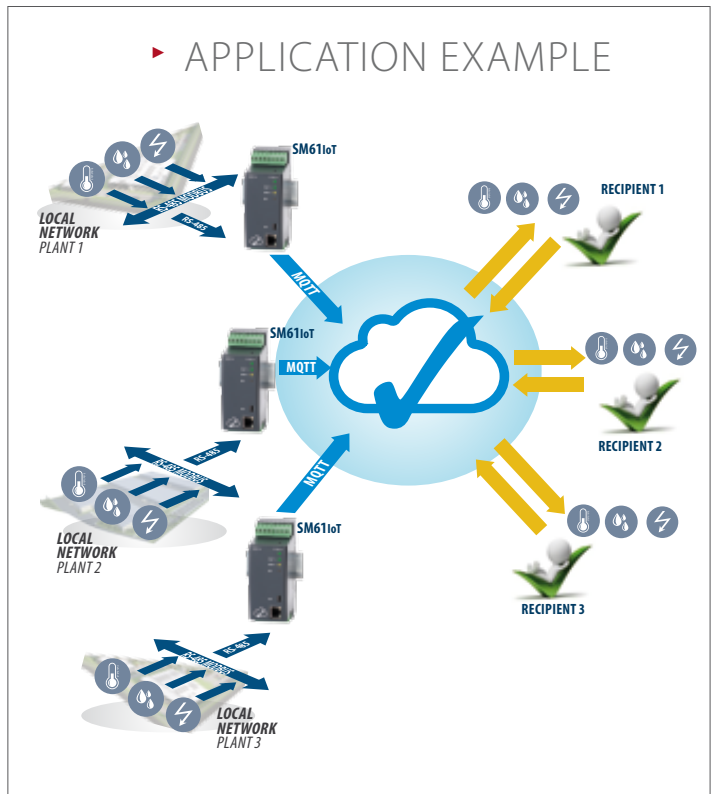

3 YEAR WARRANTY

PRODUCT CODE CONFIGURATOR at [www.lumel.com.pl](http://www.lumel.com.pl)

**ePLAN**

## POWER SUPPLIES





	ZS20-1P	ZS20-1K	ZS20-1L	ZS20-1A	ZS20-1B	ZS20-1C
<b>Rating</b>	24V / 0.63 A	24V / 1.5 A	24V / 1.75 A	24V / 2.5A	24V / 5A	24V / 7.5A
<b>Power</b>	15W	36W	45W	60W	95 ... 120 W	120 ... 180 W
<b>Input voltage range AC</b>	85 ... 264 VAC					
<b>Input voltage range DC</b>	120 ... 370 VDC			125 ... 350 VDC		
<b>Protection rating</b>	IP20					
<b>External dimensions</b>	18 x 90 x 62 mm	54 x 90 x 62 mm	54 x 90 x 62 mm	54 x 90 x 62 mm	55 x 110 x 105 mm	55 x 110 x 105 mm

# eCON - FREE SOFTWARE FOR CONFIGURATION OF LUMEL PRODUCTS


## SOFTWARE TOOL

- Easy configuration of Lumel products
- Upload / download full configuration of a device connected to a PC computer using RS-485, Ethernet, USB or PD14 programmer (USB)
- Full device configuration can be saved to a file and stored on a PC computer for later use
- Firmware update for Lumel products
- Work over the web browser

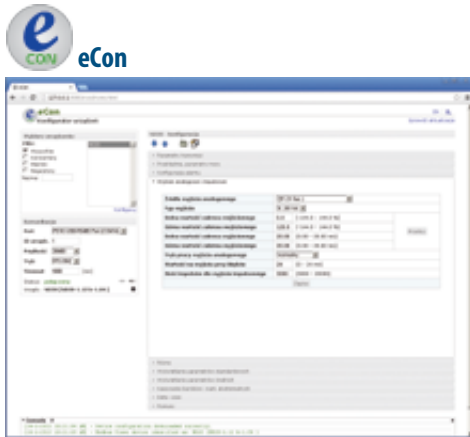



**PD10** – RS-485 to USB converter that can be used to configure using eCon a device equipped with RS-485



**PD14** – programmer to configure non RS-485 devices using eCon

# LUMEL SCANNER

## SOFTWARE TOOL

How many times have you searched for the IP address of a device that is connected to the network you manage?. If Lumel devices work in it and you have access to a local WiFi network, the problem will be solved by the free Lumel Scanner application.

Just open it on your smartphone and the devices working in a given network will be automatically tracked. Thanks to the application you will get an overview of measured parameters and access to the device's website. Additionally, to facilitate localization, you can define the name of each device according to your needs.


The application also allows you to connect devices from outside the local network, as long as you know their IP address.

The application works in Android – from version 5.1.

It supports the following devices:

- temperature and humidity data logger - HT20, HT20IoT,
- environmental parameters data logger - HT22IoT,
- data logger - HT25,
- power network meters - ND30, ND30IoT, NR30, NR30IoT,
- transducers - P30H, P300, P30U, P30P

The application works in Android – from version 5.1. It can be downloaded from Google Play.

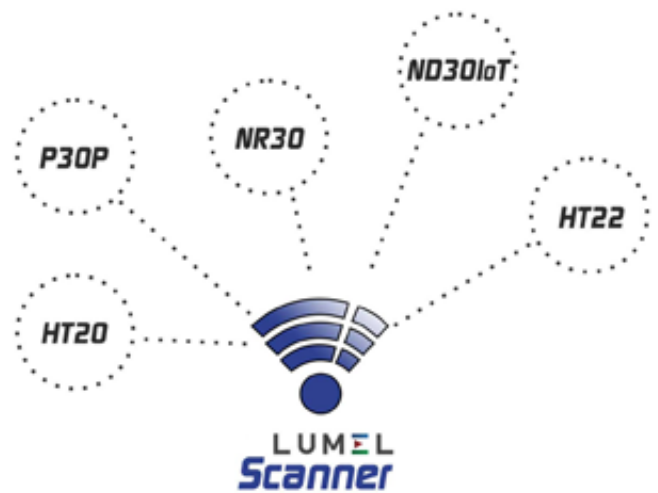

# ANALOG PANEL METERS / SCALE 90°

## ANALOG MEASUREMENT

### MOVING-IRON METERS



**EB16**



**EA16**



**EA17**



**EA19**



**EA12**

Type of scale	90°				
External dimensions	45 x 85 mm	48 x 48 mm	72 x 72 mm	96 x 96 mm	144 x 144 mm
Interchangeable scale	-	✓*	✓*	✓*	-
Measuring ranges:					
- current: · direct	100 mA ... 25 A		100 mA ... 100 A		
· through a transformer*	xA x/5 A; xA/1 A		xA x/5 A; xA x/1 A		
(on request, with twice or six-times overload)					
- voltage: · direct	6 V ... 600 V		6 V ... 1000 V		
· through a transformer	xV/100 V; xV/110 V		xV/100 V; xV/110 V		
Proof voltage	3 kV	2 kV	3 kV		
Frequency of measured value	40...45...65...72 Hz				
Protection rating	IP52	IP52 (on request IP65)			IP52
Climate version	normal or tropical		normal, tropical or similar to marine		
Class	1				

\* for current measurement up to ranges: 1 A, 1/2 A, 5 A, 5/10A), for voltage measurement - all ranges

\*\* see our current transformers (page 35)

### MOVING-IRON METERS



**MA17(P)**



**MA19(P)**



**MA12(P)**

Type of scale	90°		
External dimensions	72 x 72 mm	96 x 96 mm	144 x 144 mm
Interchangeable scale	✓	✓	✓
Measuring ranges			
(direct):	400 µA...1 A (30...1000...10 000 Hz)		
- current:	1 A...6 A (49...50...51 Hz)		
- voltage:	60 mV...1.5 V (49...50...51 Hz)		
	2.5V...600V (30...1000...10 000 Hz)		
Proof voltage	2 kV		
Protection rating	IP52 (on request IP65)		IP52
Climate version	normal, tropical or similar to marine		
Class	1		

### 3-PHASE VOLTMETERS



**EP27**



**EP29**

Type of scale	90°	
External dimensions	72 x 72 mm	96 x 96 mm
Interchangeable scale	✓	✓
Voltage measuring ranges:		
- direct phase-to-phase:	500 V	
- through a transformer:	xV/100 V; xV/110 V	
Frequency	40...45...65...72 Hz	
Proof voltage	3 kV	
Protection rating	IP40	
Climate version	normal	
Class	1.5	

### POWER METER



**PA39**

Type of scale	90°
External dimensions	96 x 96 mm
Interchangeable scale	✓
Power measuring ranges	50W...1000 MW or 50 var...1000 Mvar
Frequency	50 Hz, 60 Hz or 400 Hz
Proof voltage	2 kV
Protection rating	IP52 (on request IP65)
Climate version	normal, tropical or similar to marine
Class	1.5

3 YEAR WARRANTY

PRODUCT CODE CONFIGURATOR at [www.lumel.com.pl](http://www.lumel.com.pl)

EPLAN

# ANALOG PANEL METERS / SCALE 90°

## ANALOG MEASUREMENT

### MOVING-COIL METERS



	MB16	MA16	MA17	MA19	MA12
Type of scale			90°		
External dimensions	45 x 85 mm	48 x 48 mm	72 x 72 mm	96 x 96 mm	144 x 144 mm
Interchangeable scale	-	✓	✓	✓	-
Measuring ranges:					
- current:					
· direct measurement		100 $\mu$ A...6 A (MB16);		100 $\mu$ A...25 A	
· indirect measurement (through the shunt*)		100 $\mu$ A...25 A (MA16)		1 A...15 kA	
· 1 A...15 kA					
- voltage:					
· direct measurement		60 mV...600 V		60 mV...1000 V	
Proof voltage		3 kV		2 kV	
Protection rating	IP52		IP52 (on request IP65)		IP52
Climate version		normal or tropical		normal, tropical or similar to marine	
Rated operational conditions:					
- ambient temperature			5...23...55°C		
- relative air humidity			25...85%		
Class			1		

\* see our shunts (page 38)

### MAX DEMAND AMMETERS - BIMETALIC OR BIMETALIC AND MOVING-IRON



	BA27	BA39	BE27	BE39
Type of scale			90°	
External dimensions	72 x 72 mm	96 x 96 mm	72 x 72 mm	96 x 96 mm
Interchangeable scale	✓	✓	✓	✓
Measuring ranges:				
- bimetalic element:				
· direct measurement		0...1.2 A or 0...6 A		0...1.2 A or 0...6 A
· indirect measurement (through a transformers*)		0...1.2(x) A x/1 A or 0...1.2(x) A x/5 A		1.2(x) A x/1 A or 1.2(x) A x/5 A
- moving-iron element:				
· direct measurement		-		0...1/2 A or 0...5/10 A
· indirect (through a transformer*)		-		0...2(x) A x/1 A or 0...2(x) A x/5 A
Proof voltage		3 kV		
Protection rating		IP40 (on request IP65)		
Climate version		normal or tropical		
Class		3	3 (1.5)	

\* see our current transformers (page 35)

### POWER FACTOR AND FREQUENCY METERS



	FA39	FA32	CA36	CA37	CA39	CA32
Type of scale						
External dimensions	96 x 96 mm	144 x 144 mm	48 x 48 mm	72 x 72 mm	96 x 96 mm	144 x 144 mm
Interchangeable scale	✓	✓	✓	✓	✓	✓
Measuring ranges						
0.5 <sub>Cap</sub> ...1...0.5 <sub>IND</sub>						
0.8 <sub>Cap</sub> ...1...0.2 <sub>IND</sub>						
0.85 <sub>Cap</sub> ...1...0.85 <sub>IND</sub>						
0 <sub>IND</sub> ...1						
45...50...60...65 Hz						
Frequency			45...55 Hz; 45...65 Hz; 48...52 Hz; 55...65 Hz; 360...440 Hz; 380...420 Hz			
Proof voltage			2 kV			
Protection rating	IP52 (IP65 on request)	IP52	IP52	IP52 (IP65 on request)		IP52
Climate version			normal, tropical or similar to marine			
Class		1.5		0.5		

3 YEAR WARRANTY





PRODUCT CODE CONFIGURATOR at www.lumel.com.pl

EPLAN





# ANALOG PANEL METERS / SCALE 240°

## ANALOG MEASUREMENT





### MOVING-COIL METERS

	 <b>MA16L</b>	 <b>MA17L</b>	 <b>MA19L</b>	 <b>MA12L</b>
Type of scale	240°			
External dimensions	48 x 48 mm	72 x 72 mm	96 x 96 mm	144 x 144 mm
Interchangeable scale	✓	✓	✓	✓
Measuring ranges:				
- current:	100 $\mu$ A...60 A			
- voltage:	60 mV...600 V			
Proof voltage	2 kV	3 kV		
Protection rating	IP52 (IP65 on request)			IP52
Climate version	normal			
Rated operational conditions:				
- ambient temperature	5...23...55°C			
- relative air humidity	25...85%			
Class	1			

### MOVING-IRON METERS

	 <b>MA16L(P)</b>	 <b>MA17L(P)</b>	 <b>MA19L(P)</b>	 <b>MA12L(P)</b>
Type of scale	240°			
External dimensions	48 x 48 mm	72 x 72 mm	96 x 96 mm	144 x 144 mm
Interchangeable scale	-	-	-	-
Measuring ranges:				
- current:	100 mA, 1 A 5 A, 10 A			
- voltage:	40 V...600 V			
Proof voltage	2 kV			
Protection rating	IP52 (IP65 on request)			IP52
Climate version	normal			
Class	1			

### POWER FACTOR AND FREQUENCY METERS

	 <b>FA39L</b>	 <b>FA32L</b>	 <b>CA39L</b>	 <b>CA32L</b>
Type of scale	240°			
External dimensions	96 x 96 mm	144 x 144 mm	96 x 96 mm	144 x 144 mm
Interchangeable scale	✓	✓	✓	✓
Measuring ranges	0.5 <sub>Cap</sub> ...1...0.5 <sub>IND</sub> 0.8 <sub>Cap</sub> ...1...0.3 <sub>IND</sub> 0.8 <sub>Cap</sub> ...1...0.8 <sub>IND</sub>		45...50...55Hz 45...55...65Hz 55...60...65Hz	
Frequency	49...51 Hz (1-phase) 45...65 Hz (3-phase)		360...400...440Hz 380...400...420Hz	
Proof voltage	2 kV			
Protection rating	IP52 (IP65 on request)	IP52	IP52 (IP65 on request)	IP52
Climate version	normal			
Class	0.5			

3 YEAR WARRANTY

PRODUCT CODE CONFIGURATOR at [www.lumel.com.pl](http://www.lumel.com.pl)

**ePLAN**

# ANALOG PANEL METERS / SCALE 240°

## ANALOG MEASUREMENT

### POWER METER



PA39L

PA32L

Type of scale	240°	
External dimensions	96 x 96 mm	144 x 144 mm
Interchangeable scale	✓	
Power measuring ranges	50 W...1000 MW or 50 var...1000 Mvar	
Frequency	50 Hz, 60 Hz or 400 Hz	
Proof voltage	2 kV	
Protection rating	IP52 (on request IP65)	IP52
Climate version	normal	
Class	1.5	

3 YEAR WARRANTY

PRODUCT CODE CONFIGURATOR at www.lumel.com.pl



# DUAL ANALOG PANEL METERS/ 2 IN 1 / SCALE 90°

## MEASUREMENT

### DUAL MOVING-IRON METERS

### DUAL FREQUENCY METERS

### DUAL MOVING-COIL METERS



EA19D

CA39D

CA32D

MA19D

Type of scale	90°		
External dimensions	96 x 96 mm	96 x 96 mm	144 x 144 mm
Interchangeable scale	✓		
Measuring ranges	150...600 V; xV/100V; xV/110V  4...60 A; xA x/5A; xA/1A	45.....50.....55 Hz 45.....55.....65 Hz 55.....60.....65 Hz 360...400...440 Hz 380...400...420 Hz	1000 μA...30 A 60 mV...600 V  40 mV...1000 V
Proof voltage	3 kV	2 kV	3 kV
Parameters of measured signal	45...65 Hz	-	-
Protection rating	IP52 (on request IP65)	IP52 (on request IP65 - only for CA39D)	IP52 (on request IP65)
Climate version	normal		
Class	1	0.5	1

# CURRENT TRANSFORMERS

## ANALOG MEASUREMENT

### LCTM CURRENT TRANSFORMERS WITH A PRIMARY WINDING

	LCTM 62/W (40)	LCTM 74W (45)
Primary current [A]	1...30	1...60
External dimensions	40 x 62 mm	45 x 74 mm
Accuracy class	0.2; 0.5; 1	



LCTM series

### LCTR CURRENT TRANSFORMERS FOR A ROUND CONDUCTOR

	LCTR 45/14(40)	LCTR 50/14 (30)	LCTR 50/14 (50)	LCTR 62/R
Primary current[A]	30..300	40...300	30...300	50...600
Hole diameter	∅14	∅14	∅14	∅22
Accuracy class	0.5; 1; 3			0.2; 0.5S; 0.5; 1; 3



LCTR series

### LCTB CURRENT TRANSFORMERS FOR A BAR CONDUCTOR

	LCTB 45/21 (40)	LCTB 50/21 (30)	LCTB 50/21 (50)	LCTB 62/20 (40)	LCTB 74/20 (45)	LCTB 50/30 (30)
Primary current [A]	50...400	50...400	50...400	50...400	30...400	75...600
Hole diameter	∅20	∅21	∅21	-	∅20	∅26
Busbar (mm)	20 x 10	20x10	20x10	20 x 12 2 x 15 x 6	20 x 10	30x10; 20x15 20x20 2x20x10
Accuracy class	0.5; 1; 3			0.2S; 0.2; 0.5S; 0.5; 1; 3		0.5; 1; 3



LCTB 45

LCTB 62

PRODUCT CODE CONFIGURATOR  
at [www.lumel.com.pl](http://www.lumel.com.pl)

3 YEAR WARRANTY

### LCTB CURRENT TRANSFORMERS FOR A BAR CONDUCTOR

	LCTB 50/30 (50)	LCTB 62/30 (40)	LCTB 62/30 (50)	LCTB 74/30 (45)	LCTB 62/40 (40)	LCTB 86/40 (45)
Primary current [A]	75...600	50...800	40...800	30...800	100...800	50...1000
Hole diameter	∅26	∅30	∅28	∅26	∅31	∅36
Busbar (mm)	30x10; 20x15; 20x20; 2x20x10	30x10 2x25x10	30x10 2x25x10	30x15 2x20x10	40x10 2x30x10	40x10 2x30x15
Accuracy class	0.5; 1; 3	0.2S; 0.2; 0.5S; 0.5; 1; 3				



LCTB 74

LCTB 86

### LCTB CURRENT TRANSFORMERS FOR A BAR CONDUCTOR

	LCTB 74/40 (45)	LCTB 74/50 (45)	LCTB 86/50 (45)	LCTB 86/60 (45)	LCTB 104/60 (45)	LCTB 104/80 (45)
Primary current [A]	40...1000	100...1000	100...1250	100...1600	100...1600	200...2000
Hole diameter	∅35	∅41	∅46	∅51	∅54	∅65
Busbar (mm)	40x12 2x30x15	50x12 2x40x10	50x12 2x40x15	60x12 2x50x15	60x12 2x50x15 2x40x20	80x12 2x60x15 2x50x25
Accuracy class	0.2S; 0.2; 0.5S; 0.5; 1; 3					



LCTB 104

LCTB 86

### LCTB CURRENT TRANSFORMERS FOR A BAR CONDUCTOR

	LCTB 140/80 (45)	LCTB 140/100H (45)	LCTB 225/125 (50)	LCTB 225/167 (50)
Primary current [A]	200...2000	200...4000	600...6000	1000...7500
Hole diameter	∅72	∅86	-	-
Busbar (mm)	80x30 2x60x25	100x30 2x80x25 2x70x30	124x93	166x65
Accuracy class	0.2S; 0.2; 0.5S; 0.5; 1; 3			



LCTB 140

LCTB 225

# CURRENT TRANSFORMERS

## ANALOG MEASUREMENT

### LCTB CURRENT TRANSFORMERS FOR A BAR CONDUCTOR



	LCTB 100/100V (45)	LCTB 140/100V (45)	LCTB 100/130V (45)	LCTB 140/130V (45)
Primary current [A]	400...2500	200...3000	400...3200	400...5000
Busbar (mm)	41 x 103	100x30 2x80x25 2x70x30	38 x 128	70 x 130
Accuracy class	0.2S; 0.2; 0.5S; 0.5; 1; 3		0.2; 0.5; 1; 3	

### LCTS SPLIT CORE CURRENT TRANSFORMERS




	LCTS 93/30SC (40)	LCTS 125/50SC (40)	LCTS 155/80SC (40)	LCTS 195/80SC (64)
Primary current [A]	100...400	250...1000	250...3000	500...5000
Hole dimensions (depth x width) [mm]	23 x 33	85 x 54	85 x 125	82 x 162
Accuracy class	0.5; 1			

### LCTP 3-PHASE CURRENT TRANSFORMERS



	LCTP 75/15(60)	LCTP 105/21(40)	LCTP 140/31(40)	LCTP 185/27(45)	LCTP 185/37(45)
Primary current [A]	100...160	100...250	250...630	100...500	300...800
Hole diameter [mm]	-	-	-	Ø27	Ø37
Busbar (mm)	14 x 24	20 x 24	31 x 36	-	-
Accuracy class	0.5; 1			1	

### LRC - RESIN CAST CURRENT TRANSFORMERS



	LRC1 80/30(50)	LRC2 90/50(40)	LRC3 110/72(40)	LRC4 135/85(40)
Primary current [A]	60 A...160	200 A...320	400 A...630	800 A...1250
Hole diameter [mm]	Ø 30	Ø 50	Ø 72	Ø 85
Accuracy class	1			

### LRC - RESIN CAST CURRENT TRANSFORMERS



	LRC5 165/115(40)	LRC6 195/130(40)	LRC7 230/165(40)	LRC8 295/200(40)
Primary current [A]	1500 A...2000	2500 A...3200	3000 A...3200	4000 A...5000
Hole diameter [mm]	Ø 115	Ø 130	Ø 165	Ø 200
Accuracy class	1			

### LU01 - SUMMATION CURRENT TRANSFORMERS



	LU01 (75)	LU01 (150)
Inputs [A]	2 x 5A...4 x 5A	5 x 5A...8 x 5A
Secondary current	5 A	5 A
Dimensions [mm]	70 x 75	70 x 150
Accuracy class	0.5; 1	

### LW - ROUND CURRENT TRANSFORMERS



	LW01	LW02	LW03	LW04	LW05	LW06
Primary current [A]	50...200	50...200	75...300	120...600	200...1000	600...3200
Hole diameter [mm]	Ø30	Ø30	Ø43	Ø58	Ø72	Ø113
Outer diameter [mm]	Ø73	Ø73	Ø92	Ø100	Ø110	Ø159
Accuracy class	0.5; 1	0.2; 0.5S; 0.5; 1				

3 YEAR WARRANTY

PRODUCT CODE CONFIGURATOR at www.lumel.com.pl

ePLAN

# CURRENT TRANSFORMERS

## ANALOG MEASUREMENT

### LE - ROUND CURRENT TRANSFORMERS

	LE01 73/30 (50)	LE03 92/43 (41)	LE04 95/50 (40)	LE05 100/58 (41)
Primary current [A]	50...200	200...400	200...300	400..600
Hole diameter [mm]	∅30	∅43	∅50	∅58
Outer diameter [mm]	∅73	∅92	∅95	∅100
Accuracy class	1;5		1	



### LE - ROUND CURRENT TRANSFORMERS

	LE06 110/72 (41)	LE07 135/85 (30)	LE08 159/113 (40)	LE09 165/130 (30)
Primary current [A]	800...1000	800...1200	1200...2000	2400...3000
Hole diameter [mm]	∅72	∅85	∅113	∅130
Outer diameter [mm]	∅110	∅135	∅159	∅165
Accuracy class			1	




### CURRENT TRANSFORMERS DEDICATED TO ND20CT

	LJ12	LJ25, LJ35, LJ45	L306, L307, L308
Version	1-phase		3-phase
Range	50-250 A*	60-600 A*	63-250 A*
Class		1 or 0.5*	
Connection way to ND20CT		RJ12 connector	screw terminals

\* - more detailed informations in data sheet

**We offer:** On customers request we offer transformer calibration certificates.

### ACCESSORIES:

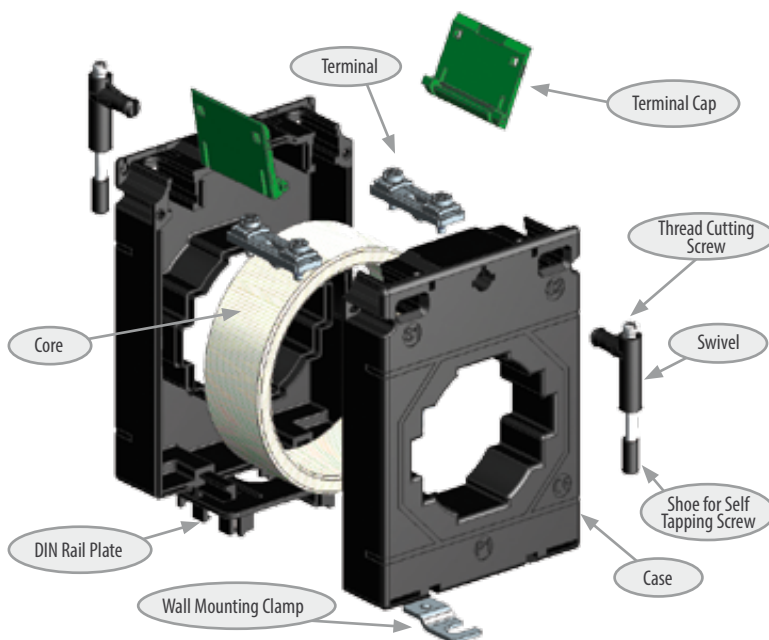

MORE INFORMATION  
IN OUR CATALOG:




3 YEAR WARRANTY

PRODUCT CODE CONFIGURATOR at [www.lumel.com.pl](http://www.lumel.com.pl)

EPLAN

# SHUNTS / CLASS 0.2, 0.5

## ANALOG MEASUREMENT

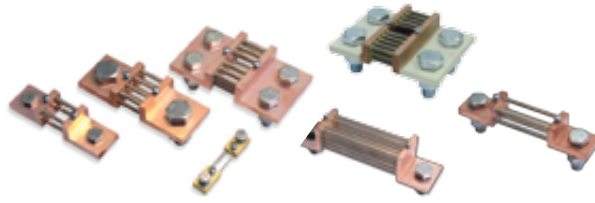

	B1	B2	B3	B4	B5	B6
Voltage drop	30 mV	60 mV	150 mV	50 mV	75 mV	100 mV
Rated current	1 A...15 kA (1; 1.5; 2.5; 4; 6 and their decimal multiples)					
Accuracy class	0.2 or 0.5					

- shunts from 1...25 A are fixed on insulating basis with the possibility to be mounted on a DIN rail (except B1 type)
  - shunts of other ranges are fixed directly on the DC rail or cable
  - dimensions acc. DIN 43703
  - shunts 40...150 A - insulating base as a option for B2 types
- on request additional chemical coating are available: varnishing or silver



plate  
shunts

### BP4

Voltage drop	50 mV
Rated current	5 A...500 A
Accuracy class	0.5


- Custom-made executions are available on request (voltage drop, current).

## ADAPTER FOR DIN RAIL TS35


- Designed for mounting of panel instruments on the DIN rail TS35.

### ADAPTER ATS

	ATS1	ATS2	ATS3	ATS4	ATS5	ATS6
Hole dimensions (width x height) [mm]	92 <sup>+0.8</sup> x 92 <sup>+0.8</sup>	92 <sup>+0.8</sup> x 45 <sup>+0.6</sup>	68 <sup>+0.7</sup> x 68 <sup>+0.7</sup>	45 <sup>+0.6</sup> x 92 <sup>+0.8</sup>	45 <sup>+0.6</sup> x 45 <sup>+0.6</sup>	dedicated for transducers P18, P18D, P18L
Panel instruments dimensions (width x height) [mm]	96 x 96	96 x 48	72 x 72	48 x 96	48 x 48	



Adapter ATS1



Adapter ATS6

## ENLARGING FRAME

- Designed to reduce the mounting hole from 96 x 96 mm to 48 x 96 mm or 96 x 48 mm.

**Ordering code:** CZ/20-810-01-00004



3  
YEAR  
WARRANTY

PRODUCT CODE  
CONFIGURATOR  
at www.lumel.com.pl

ePLAN

# CAM SWITCHES

## ANALOG MEASUREMENT



**PKT1 / PKS1 / PKH1**  
changeover



**PKT2 / PKS2 / PKH2**  
multi-step



**PKT3 / PKS3 / PKH3**  
isolator



**PKT4**  
selector

### PKT1, PKT2, PKT3, PKT4

### PKS1, PKS2, PKS3

### PKH1, PKH2, PKH3

PARAMETERS	UNIT	6 A	10 A	16 A	20 A	25 A	32 A	40 A	63 A	100 A	200A
Rated operational voltage (Ue)	V	440	440	690	690	690	690	690	690	690	690
Rated Insulation voltage (Ui)	V	440	440	690	690	690	690	690	690	690	690
Rated uninteruptd current (Ith)	A	8	12	20	25	32	40	50	80	125	225
Rated short time withstand current (Icw)	A	72	120	192*	240*	300	384	480	756	1200	2400
Rated Impulse withstand voltage (Uimp)	kV	4	4	4	4	6	6	6	6	6	6
Rated Fuse short circuit current	kA	3	3	5	5	10	10	10	10	15	15
Frontal frame dimensions	mm	48 x 48				64 x 64				88 x 88	

\* Rated short time withstand current (0.5s- current)



**PKR1 / PKR5**  
ON-OFF spring return  
switches



**PKR2/PKR6**  
double throw with off



**PKR3 / PKR7**  
spring return switches  
without off



**TKR1 / TKR2**  
spring return cam switches 1xNO 1xNC /  
spring return cam switches 2xNO 2xNC

### PKR1, PKR2 PKR3, PKR5, PKR6, PKR7

### TKR1, TKR2

PARAMETERS	UNIT	16 A	20 A	25 A	32 A
Rated operational voltage (Ue)	V	690	690	690	690
Rated Insulation voltage (Ui)	V	690	690	690	690
Rated uninteruptd current (Ith)	A	20	25	32	40
Rated short time withstand current (Icw)	A	192*	300	300	384
Rated Impulse withstand voltage (Uimp)	kV	4	6	6	6
Rated Fuse short circuit current	kA	5	10	10	10
Frontal frame dimensions	mm	48 x 48	64 x 64	65 x 65	

\* Rated short time withstand current (0.5s- current)

#### RATED OPERATING CONDITIONS

Frequency	50/60 Hz
Operating temperature	-25°C...60°C
Installation category	III
Protection grade	IP50 from frontal side   IP20 from terminal side
Standards	IEC 60947-1, IEC 60947-3, IEC 60947-5

#### SWITCH LIFE

Mechanical Life	100 000 operations at 300 cycles/hr
Electrical Life	10 000 operations at 100% rated duty at 120 cycles/hr

3 YEAR WARRANTY

PRODUCT CODE CONFIGURATOR at [www.lumel.com.pl](http://www.lumel.com.pl)

EPLAN

# PORTABLE MULTIMETERS & CLAMP METERS



**SOON  
AVAILABLE  
IN FULL  
A CLASS**

## NP45

Portable power quality analyzer

- 5.6" TFT color screen, 640 x 480 pixel,
- waveform real-time display (4 voltages/4 currents),
- half cycle RMS measurement (voltage and current),
- measurement of TRMS currents up to 6000 A (with additional probes mode),
- measurement in 1-phase and 3-phase systems (3 - and 4-wire),
- measurement of voltage, current, harmonics, power, energy, inrush current, flicker and other,
- graphical presentation of data in a waveform and vector diagram,
- record of events: dips, swells, overvoltages,
- power quality according to EN-50160 standard or user-defined limit,
- registration of user-defined parameters in the 32GB internal memory (registration time from 2 h up to 1 year),
- Ethernet and WiFi interfaces for remote operation of the analyzer,
- USB Host to move archive data and screenshots to an external USB memory,
- safety standards: EN 61010-1, CAT III 1000V / CAT IV 600V



## NP40

Portable power quality analyzer

- half cycle RMS measurement (voltage and current);
- measurement of TRMS currents up to 3000 A (with standard sensor);
- measurement in 1-phase and 3-phase systems (3 - and 4-wire);
- measurement of voltage, current, harmonics, power, energy, inrush current, flicker and other;
- graphical presentation of data in a waveform and vector diagram;
- record of events: dips, swells, over voltages;
- power quality according to EN-50160 standard or user-defined limit;
- internal memory for data logging needs (continuous registration from 2 hours to 7 days), the registration frequency from 1 second up to 60 minutes;
- built-in 8G memory card;
- Ethernet interface for remote operation of the analyzer;
- USB Host to move archive data and screenshots to an external USB memory;
- safety standards: EN 61010-1, CAT III 1000V / CAT IV 600V;
- 5,6" TFT color screen, 320 x 240 pixel;
- waveform real-time display (4 voltages/4 currents).



## NP15

TRUE RMS digital multimeter with data logger & view function

- voltage measurement of AC, DC and AC / DC up to 1000V;
- current measurement of AC, DC and AC / DC up to 10A;
- low input impedance;
- measurement of TRMS effective;
- data logging & view function (up to 32000 readings);
- 100 kHz bandwidth for voltage measurement;
- resistance measurement;
- frequency and duty cycle measurement;
- temperature measurement with J, K, Pt100 & Pt1000 sensors;
- capacitance measurement;
- automatic / Manual measuring range selection;
- low-pass filter mode with a cutoff frequency of 1kHz;
- voltage noise measurement and suppression (dB);
- square wave signal generator;
- continuity test and diode test;
- function: Backlight, Relative / Zero, Auto Hold, Min / Max / Avg;
- acoustic signal indicating the overrange (Go / NoGo);
- information on dangerous voltage at the terminals;
- external power supply;
- fuse 16 A for all current measurement ranges to protect the device.



## NP15B

TRUE RMS digital multimeter with data logger & view function

- voltage measurement of AC, DC and AC / DC up to 1000V;
- current measurement of AC, DC and AC / DC up to 10A;
- low input impedance;
- measurement of TRMS effective;
- data logging & view function (up to 32000 readings);
- 100 kHz bandwidth for voltage measurement;
- resistance measurement;
- frequency and duty cycle measurement;
- temperature measurement with J, K, Pt100 & Pt1000 sensors;
- capacitance measurement;
- automatic / Manual measuring range selection;
- low-pass filter mode with a cutoff frequency of 1kHz;
- voltage noise measurement and suppression (dB);
- square wave signal generator;
- continuity test and diode test;
- function: Backlight, Relative / Zero, Auto Hold, Min / Max / Avg;
- acoustic signal indicating the overrange (Go / NoGo);
- information on dangerous voltage at the terminals;
- external power supply;
- fuse 16 A for all current measurement ranges to protect the device.



## NP10

Digital multimeter

- capacitance from 1pF..40.00 mF with zero correction;
- direct and alternating voltages from 100  $\mu$ V ... 1000 V;
- direct and alternating currents from 10  $\mu$ A ... 10.00 A;
- resistance from 100 m $\Omega$ ... 60.00 M $\Omega$ ;
- frequencies from 10.00 Hz ... 10 MHz;
- diode measurement and continuity testing;
- hold measurement- the value can be held and display simultaneously;
- relative measurement by pressing and holding PEAK and then pressing AUTO/MAN key;
- duty cycle (%) measurement;
- temperature measurement with 'K' type Thermocouple (NiCr - Ni) in the range from 0°C to 1300°C acc. to EN 60584;
- peak value measurement.



3 YEAR WARRANTY

PRODUCT CODE CONFIGURATOR at www.lumel.com.pl

ePLAN

# PORTABLE MULTIMETERS & CLAMP METERS

## NP06

### Digital multimeter



- direct and alternating voltages from 100µV ... 1000V,
- direct and alternating currents from 10µA ... 10.00A,
- resistance from 1Ω... 40.00MΩ with zero correction,
- resistance from 1pF... 200.00µA with zero correction,
- frequencies from 10.00 Hz ... 10MHz,
- diode measurement and continuity testing,
- duty cycle (%) measurement,
- hold measurement,
- relative measurement,
- non contact voltage detection.

## NP08

### Digital multimeter



- direct and alternating voltages from 100µV ... 1000V,
- direct and alternating currents from 10µA ... 10.00A,
- resistance from 1Ω... 40.00MΩ with zero correction,
- resistance from 1pF... 200.00µA with zero correction,
- frequencies from 10.00 Hz ... 10MHz,
- diode measurement and continuity testing,
- hold measurement
- relative measurement
- duty cycle (%) measurement,
- temperature measurement with 'K' type Thermocouple,
- backlit facility.

## NC14

### Power clamp-on meter



- AC & DC voltage measurement up to 1000 V;
- AC & DC current measurement in the range of 1000 A / 400 A;
- inrush/peak value measurement;
- active, reactive and apparent power measurement;
- power measurement in KM;
- energy consumption measurement in kWh;
- measurement up to 49th harmonics;
- phase angle measurement;
- THD measurement;
- DF measurement;
- crest factor /CF/ measurement;
- power factor /PF/ measurement;
- LPF mode.

## NC12

### Clamp-on meter



- current measurement up to 300 and 1000 A AC;
- measuring voltage up to 1000 V AC / DC;
- measuring temperature from -200°C to 800°C (Pt100 and Pt1000);
- the diameter of measured cable 50 mm (the meter up to 1000A);
- the diameter of measured cable 40 mm (the meter to 300A);
- illuminated digital display with analog indicator;
- a number of features:
  - HOLD - Stop function currently displayed measured value,
  - MIN, MAX - recording the minimum and maximum values measured;
- auto power off;
- an adjustment of the resistance or capacitance - for low measuring low resistance or capacitance, resistance wire or stray capacitance for a range of nF can be compensated by pressing the Shift;
- automatic and manual mode;
- available measuring function diodes and transistors;
- degree of protection IP20.

## NC11

### Clamp-on meter



- the diameter of measured cable 50 mm (the meter up to 1000A)
- the diameter of measured cable 40 mm (the meter to 400A)
- current measurement up to 400 and 1000 A AC
- measuring voltage up to 1000 V AC
- measuring temperature from 0 to 1300°C (K type termocouple)
- illuminated digital display with analog indicator,
- a number of features:
  - HOLD - Stop function currently displayed measured value,
  - Auto power off,
- for low ohm measurement, the lead resistance can be compensated by pressing the REL key,
- automatic and manual mode,
- available measuring function diodes and transistors,
- degree of protection IP20.
- an adjustment of the resistance - for low measuring low resistance or can be compensated by pressing the Shift button

## NT10

### Insulation meter



- insulation resistance measurement up to 3 GΩ;
- measurement of DC and AC voltage in the range of 30 mV...1000V;
- measurement of DC and AC current in the range of 300 µA...300 mA;
- resistance measurement 30 Ω...30 MΩ;
- capacity measurement 30 nF...30 µF;
- frequency measurement 300 Hz...100 kHz;
- measuring the fill factor (%);
- HOLD Function;
- temperature measurement in the range of -200...800°C / Pt100/ Pt1000;
- analog scale.

3 YEAR WARRANTY

PRODUCT CODE CONFIGURATOR at www.lumel.com.pl

EPLAN



# PROTECTION RELAY

NUMERICAL PROTECTION, AUTOMATION, MEASUREMENTS,  
CONTROL, RECORDING AND COMMUNICATION




**ZIP-PRO**



**extZIP-PRO**



**ZIP-2R PRO/  
ext ZIP-2R PRO**



**ZIP-PV PRO/  
ext ZIP-PV PRO**



Description	Numerical protection relays for utilities and industry MV switchgears	Numerical protection relay for MV switchgears with additional inputs and outputs and communication ports	Automatic bus transfer relay for MV switchgears	Integrated protection and control relay for EPV switchgears and other renewable energy sources
External dimensions :				
- rear side mounted version	306 x 172 x 154 mm	283 x 190 x 153.5 mm	306 x 172 x 154 mm/283 x 190 x 153.5 mm	
- front side mounted version	306 x 176 x 200 mm	312 x 213 x 235 mm	306 x 176 x 200 mm/312 x 213 x 235 mm	
Weight	6 kg			
Protection rating	IP50			
Ambient temperature	-10...+55°C			
Storage temperature	-20°C ... +70°C			
Display	LCD TFT 7", 800x480, with touch panel			
Programmable diodes	14 two-colour programmable LEDs			
Programmable logics	Yes (40 logics line)			
Binary inputs	28	28 or 56	28/28, 56	28/28, 56
Relay outputs	20	20 or 40	20/20, 40	20/20, 40
Error log	Yes			
Event log	Yes			
Communications ports	USB, 2 x RS-485, Ethernet 10/100 BASE-TX, fibre optic (option)	USB, 2 x RS-485, Ethernet 10/100, BASE-TX, fibre optic (option), CAN-BUS/RS-485(option)	USB, 2 x RS-485, Ethernet 10/100, BASE-TX, fibre optic (option)	USB, 2 x RS-485, Ethernet 10/100 BASE-TX, fibre optic (option)
Protocols	DNP 3.0, IEC 60870-5-103 and 104, IEC 61850, Modbus ASCII / RTU	DNP 3.0, IEC 60870-5-103 and 104, IEC 61850, Modbus ASCII/RTU, PPM2 protocol on CAN-BUS/RS-485 port	DNP 3.0, IEC 60870-5-103 and 104, IEC 61850, Modbus, ASCII/RTU	DNP 3.0, IEC 60870-5-103 and IEC 60870-5-104, IEC 61850, Modbus ASCII/RTU
<b>POWER</b>				
Rated supply voltage	220 V d.c. 0..220..300 V	230 V a.c. 85..230..265 V	24 V d.c. 19..24..65 V	
Power consumption	< 20 W			
<b>PHASE CURRENT INPUT CIRCUITS</b>				
Rated current $I_n$	5 A or 1 A			
Measurement range	0...192 A			
Measurement range	0 A >	0.35 A - 50 A	<192 A < 10%	< 1.5%    < 10%
Rated frequency $f_n$	50 Hz			
Power consumption at $I=I_n$	< 0.5 VA			
<b>PHASE VOLTAGE INPUT CIRCUITS</b>				
Rated voltage $U_n$	100 V			
Measurement range	0...130 V			
Measurement error in measurement range	< 1.5%			
Rated frequency $f_n$	50 Hz			
Power consumption at $U=U_n$	< 0.4 VA			
<b>ZERO SEQUENCE CURRENT INPUT CIRCUITS</b>				
Rated current $I_{0n}$	0.5 A			
Measurement range	0-5 A			
Measurement error	0.02 - 3.5 A		< 1.5%	
Rated frequency $f_n$	50 Hz			
Power consumption at $I=I_{0n}$	< 0.4 VA			



# PROTECTION RELAY

NUMERICAL PROTECTION, AUTOMATION, MEASUREMENTS,  
CONTROL, RECORDING AND COMMUNICATION



CZIP-PRO



extCZIP-PRO



CZIP-2R PRO/  
ext CZIP-2R PRO



CZIP-PV PRO/  
ext CZIP-PV PRO

ENERGIZING INPUTS (ZERO SEQUENCE VOLTAGE INPUT CIRCUITS)			
Rated voltage $U_{0n}$	100 V		
Measurement range	0...130 V		
Measurement error in measurement range	< 1.5%		
Rated frequency $f_n$	50 Hz		
Power consumption at $U = U_{0n}$	< 0.4 VA		
BINARY INPUTS			
Rated input voltage	24 V	220 V	
Input voltage range	17...32 V	88...253 V	
Current consumption	< 0.25 mA	< 3 mA	
SIGNAL OUTPUTS			
Rated voltage	220 V	24 V	
Continuous current-carrying capacity	5 A		
Inductive circuit opening			
• 220 V DC, L/R = 40 ms	0.1 A		
• 220 V AC, $\cos f = 0.4$	2 A		
POWER OUTPUT RELAY			
Rated voltage	220 V	24 V	
Continuous current-carrying capacity	8 A		
Inductive circuit opening: 220 V DC, L/R = 40 ms	1,2 A/300 cycles		
Time - switching of impulse	min 0.1 s		
Time - switching on impulse	min 0.1 s		
Software	CZIP-Set		
Intended use	Preconfigured settings and configurations including protections, measurements, control, recording and communication for all types of MV switchgear bay in the same housing: <b>L</b> feeder bay <b>E</b> feeder bay with local power station (including wind farm) <b>Z</b> incoming bay <b>T</b> MV side of the 110 kV/MV transformer <b>C</b> capacitor bay <b>K</b> grounding transformer in compensated network <b>P</b> grounding transformer in network with neutral earthing resistor <b>X</b> grounding transformer in network with choke/resistor parallel system <b>U</b> voltage measurement bay <b>S</b> bus coupler bay <b>H</b> 110 kV side of the 110 kV MV transformer	2R automatic bus transfer without recovery cycles 2R1T automatic bus transfer without recovery cycles with one power transformer 2R mini automatic bus transfer with recovery cycles and two incoming lines 2R3H automatic bus transfer with recovery cycles and three incoming lines	PV service line
Unique protections and functionality	Under-impedance protection against phase-to-phase short-circuits. Sensitive, adaptive protection for high resistance earth fault (up to 8 kΩ). Selective earth fault protection for grounding transformer bays.		

# PROTECTION RELAY

NUMERICAL PROTECTION, AUTOMATION, MEASUREMENTS,  
CONTROL, RECORDING AND COMMUNICATION

► extCZIP-PRO




► CZIP-PRO



► extCZIP-PV-PRO



CUT  
PRODUCTION  
COSTS

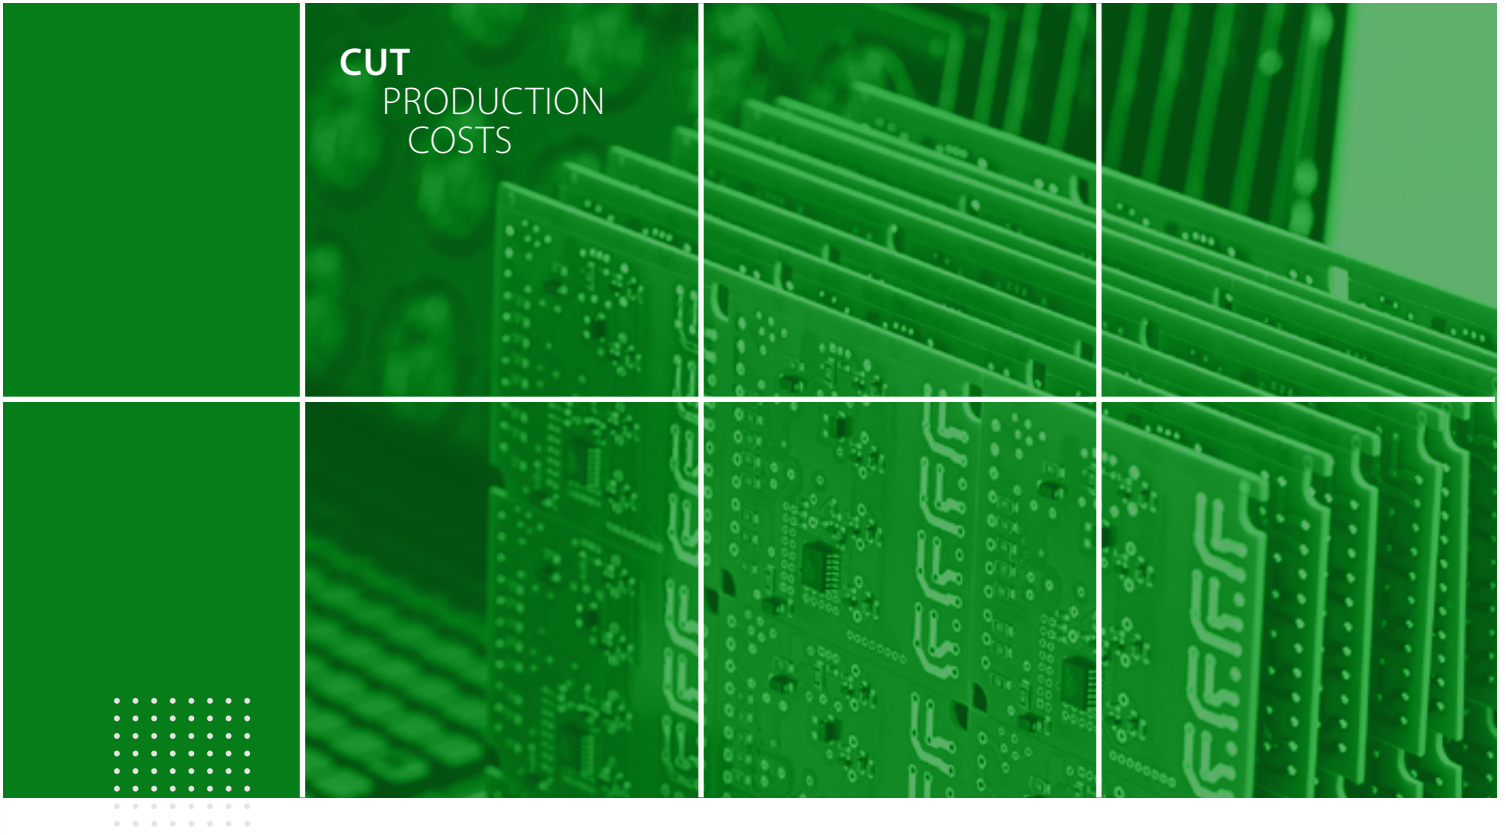

For close to 70 years, LUMEL is well-known in the international market for the production of highest quality of electronic measuring devices. Precision has been the instilled in the roots of LUMEL, our proficient employees and cutting edge technologies permit us to offer:

- ▶ **EMS** - Every year forward, we receive numerous orders for assembly of electronic subassemblies, determining us to invest in up-to-date and high-duty lines for SMT assembling of electronic elements, making us capable of producing prototypes, small, medium and large sized PCBs.
- ▶ **OEM / ODM** - Conceptualizing – Designing – Development – Production, in the scope of housing, electronics, mechanics, software. All Under one roof. We offer sub-contracting services and industrial co-operation.

Knowing that your electronic products will be produced by a competent manufacturer, you can be free from responsibilities of manufacturing and can lay your focus on other sectors of your business such as marketing and sales while the goods are being prepared.

## RESEARCH & DEVELOPMENT LABORATORY SERVICES

Lumel laboratory is where your products go through a detailed series of tests like:

- ▶ Environmental,
- ▶ EMC,
- ▶ Vibration,
- ▶ Functional test.



## SURFACE MOUNT TECHNOLOGY (SMT) SERVICES

- ▶ One-sided and double-sided assembling of SMD elements in the technology of reflow soldering, in accordance with European Directive for RoHS.
- ▶ Assembly of thread elements by flow soldering,
- ▶ Assembly can be carried out on the base of own or committed elements.



### The first assembly line is composed of:

- ▶ Silk screen printer Ersa
- ▶ Two automatic machines JUKI (flexible KE-3020VA and high-speed chip shooter: FX-3RA).
- ▶ 7-zones reflow soldering oven Ersa HOTFLOW 3/14E.
- ▶ The whole line consists of handling system, loader, conveyors and unloader

### The second assembly line is composed of:

- ▶ Silks cren printer JUKI K1760,
- ▶ Placement machine JUKI KE-2060,
- ▶ Reflow oven Ersa HOTFLOW 2/14,
- ▶ Magazine loader and line unloader – JOT,
- ▶ Conveyors and in-line workstation – JOT.



### Additionally our machine park is equipped with:

- ▶ Tester AOI - PowerSpecter GTAz 350CE Dolphin
- ▶ Optical control stands,
- ▶ Flying Probe Takaya tester.

The entire assembly process is carried out under the strict supervision of a team of technologists and is in accordance with the European directive IPC-A-610G.

## OUR SMT LINES CAN MOUNT UP TO **105,000** ELECTRONIC COMPONENTS PER HOUR.

PCB size **max. 410x360mm / min. 50x30mm / Optimum: 200x300mm /**

The number of layers: **36**

Components up to size **1005 – 74 mm x 74 mm**

<p><b>Laminate thickness:</b> Maximum: 5.0mm Minimum: 0.5mm</p>	<p><b>Materials:</b> FR4, CEM, Aluminium, flexibel</p>	<p><b>Copper plating:</b> HAL RoHS, HAL Pb, OSP, chemical or galvanic gold plating, silver plating</p>
<p><b>Copper thickness Material [µm]:</b> 12 / 18 / 35 / 70 / 105</p>	<p><b>Final thickness after metallization [µm]:</b> 30 / 35 / 60 / 95 / 130</p>	<p><b>Available soldermask colors:</b> green (standard), red, black, white, blue, other colors on customer's request</p>
<p><b>Minimum path width:</b> Value [mm]: 0.1 / Recommended [mm]: 0.2</p>	<p><b>The minimum hole diameter:</b> Value [mm]: 0.1 / Recommended [mm]: 0.3</p>	<p><b>The minimum distance copper – copper</b> Value [mm]: 0.1 / Recommended [mm]: 0.2</p>
<p><b>Additionally:</b> carbon paste, UL peelable mask, marking</p>		

## THROUGH HOLE TECHNOLOGY (THT) SERVICES



In addition, we also provide services in the field of:

- ▶ Programming.
- ▶ Coating finished products with varnishes or protective compounds.
- ▶ Performing functional tests.
- ▶ Final assembly of the product.
- ▶ Calibration of the devices.

As part of the offered THT assembly service, we implement the following steps:

- ▶ Preparation of elements, automatic processing - cutting and bending.
- ▶ Placement of elements - manual assembly and soldering.
- ▶ Assembly of elements on a solder wave.
- ▶ Cable processing.



Machine park:

- ▶ All stations are equipped with ESD protection measures in accordance with EN 61340 5-1 and 5-2.
- ▶ Solder wave - Nova Star 12D.
- ▶ Washing and drying station - Pbt Super Swash.

## ADDITIONAL SERVICES



### DESIGNING:

When customers come to us with ideas, we offer them our team of designers and programmers who prepare model, prototypes and perform necessary tests required which confirm that the product fulfills all the CE standards.

### ADDITIONAL TESTS:

Our products are tailor made keeping our customers demand in consideration, therefore we also offer different sample size and medium of test for a minimum cost in case the customers want customized test samples to comply to the needs of their products.

### PROTECTING COATS:

With high quality products, programmable selective coating on any part of the PCB with a protective varnish or resin is performed, according to the customers demand.

### LABELING:

After your product is mounted, we can place your logo and the details you require.

### PACKAGE DESIGNING:

Every PCB and electronic device manufactured in our facility is precisely protected and we pack them in accordance to the customers guidelines. We make sure that the packaging is done to the best of our abilities so that the product is safe and sound

### SERVICING:

Servicing of any parts (assembly and disassembly) is offered as an extra service by our team.

**CHECK** YOUR INSTRUMENTS  
AT OUR **LABORATORY**

/ Checking should be carried out regularly in all places where precise measurements significantly influence human life and health. /

## Our services for you

If you want to have a **GUARANTEE**, that your instruments work properly - **USE OUR LABORATORY!**

We provide services related to calibration of analogue and digital devices, including:

- ▶ 3-phase power network meters,
- ▶ multi-channel controllers and recorders,
- ▶ ammeters, voltmeters, wattmeters,
- ▶ multimeters,
- ▶ shunts and current transformers,
- ▶ temperature meters and sensors (thermoresistive, semiconductor, thermocouples),
- ▶ humidity meters and transducers.

The laboratory also performs tests of devices in the scope of:

- ▶ electromagnetic compatibility,
  - electromagnetic noise immunity according to EN 61000-6-2,
  - emission of electromagnetic interference according to EN 61000-6-4,
  - safety (including safety according to EN 61010-1)
- ▶ ambient and environmental conditions,
- ▶ vibrations and impacts ( among others transport conditions),
- ▶ measurement accuracy.

**We guarantee competitive prices and delivery dates!**

**We are looking forward to doing business with you and working together!**

## CONTACT:

address:  
LUMEL S.A.  
ul. Słubicka 4  
65-127 Zielona Góra, Poland  
e-mail: [laboratorium@lumel.com.pl](mailto:laboratorium@lumel.com.pl)



Electrical quantities



Temperature



Temperature and relative air humidity

## AUTOMATION:

### EXPORT DEPARTMENT - OFFICE POLAND:

+ 48 68 45 75 130 or + 48 693 290 962

✉ [export@lumel.com.pl](mailto:export@lumel.com.pl)

### DACH / NL / BE SALES MANAGER

+49 152 0947 1770

### LATIN / FR / IT SALES MANAGER

+ 34 683 60 63 53

### BALCAN / CZ / SK SALES MANAGER

+36 20 9343 785

### AP SALES MANAGER

+886 935 276522

### MEA / AFR / TR SALES MANAGER

+971 52 465 2511

### CY / GR / NORTH SALES MANAGER

+357 99790671

### INDIA SALES MANAGER

+91 7755907813

## EMS | ODM | OEM SERVICES:

+ 48 693 290 405 or + 48 68 45 75 144

✉ [ems@lumel.com.pl](mailto:ems@lumel.com.pl)

## RESEARCH LABORATORY:

tel. + 48 68 45 75 161

✉ [laboratorium@lumel.com.pl](mailto:laboratorium@lumel.com.pl)

## PROTECTION RELAYS | CZIP:

+ 48 508 468 520

✉ [k.kocmierowski@lumel.com.pl](mailto:k.kocmierowski@lumel.com.pl)

## CUSTOMER SERVICE:

+ 48 68 45 75 151

+ 48 68 45 75 152

+ 48 68 45 75 153

+ 48 68 45 75 154







# LUMEL

LUMEL has been known, since 1954, all over the world, as a manufacturer of top quality industrial automation devices. In 2020, international reports listed Lumel as one of the world's leaders in the production of electrical quantity transducers, network parameter analyzers and analog meters.

Lumel offers consists of product categories, such as:

- ▶ Network parameter meters and analyzers
- ▶ Electrical and non-electrical quantity transducers
- ▶ Digital meters
- ▶ Recorders and data loggers
- ▶ Controllers
- ▶ Analog meters
- ▶ Current transformers
- ▶ Shunts

Depending on the needs of the customer, the automation products and systems our offer relay on various data communication protocols (MODBUS, ETHERNET, PROFINET, BACNET or MQTT).

Apart from the products, Lumel specializes in complex systems used for:

- ▶ monitoring and optimizing the cost of electricity and other utilities (water, gas, compressed air)
- ▶ monitoring environmental parameters: temperature, humidity, light intensity, CO<sub>2</sub>, volatile gases
- ▶ solar energy

In addition to its manufacturing activity, Lumel offers also

- ▶ OEM services in the scope of housing designing, electronics, mechanics, hardware and software. All under one roof.
- ▶ EMS services
- ▶ ODM services

We are a member of an international capital group which consists of the following companies: LUMEL S.A., LUMEL ALUCAST Sp. z o.o., Rishabh Instruments Pvt. Ltd., Sifam Tinsley US, Sifam Tinsley UK.

JANUAR 2022

## LUMEL S.A.

ul. Słubicka 4, 65-127 Zielona Góra, Poland  
tel.: 68 45 75 100, fax. 68 45 75 508  
[www.lumel.com.pl](http://www.lumel.com.pl)